



kreon installation manual

technics & dimensions



name	length (mm)
XS	532
S	1032
M	1532
L	2032
XL	3032

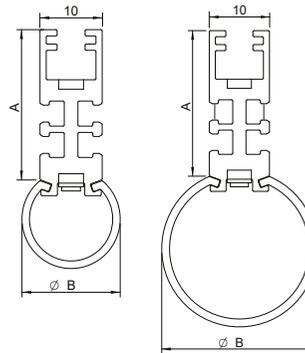



name	reference	voltage	power	A	B
kagi profile 16 rec	KR954002-xxxx-xx-xx	24VDC	12.22W/m	24	16
kagi profile 26 rec	KR954102-xxxx-xx-xx	24VDC	12.22W/m	24	26

Please make sure the main voltage is disconnected before proceeding! ⚡

1. installation

Install the plasterkit as described in installation manual KR8000002348 and provide 24V-wires. Place the power supply on remote.



Connect the wires of the profile to the 24VDC wires: black(-) and red(+). Connectors (AWG 22-16) are supplied, please use stripped wires and suitable crimping pliers for proper connection.

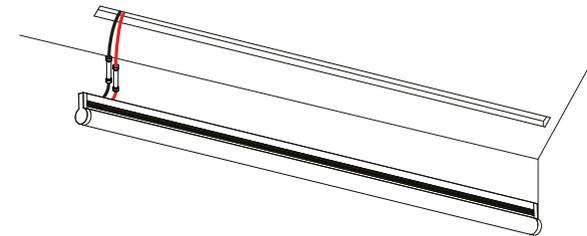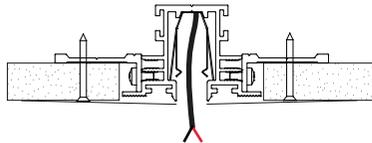

2. installation

Tuck the wires in the ceiling as much as possible. Place the remaining wires in the profile and the connector on/in the profile.


Push the profile in the clips in the plasterkit to finish.

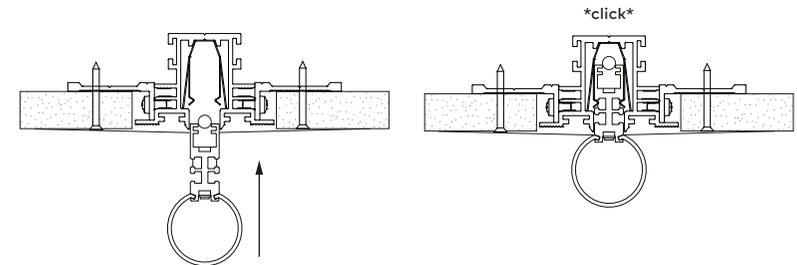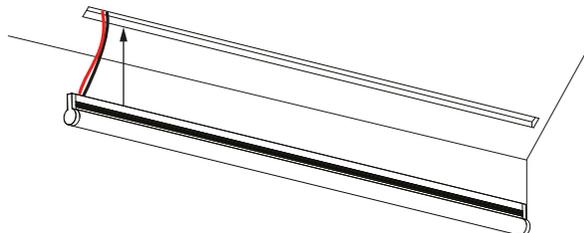

kreon installation manual


electric connection

Multiple profiles can be powered in parallel or with a separate power supply




electric connection


In case of ON/OFF



In case of 1-10V (controller KR774106)



In case of DMX, DALI (controller KR774006)

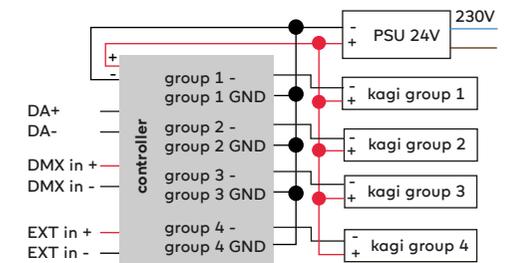

pictures