

Date: \_\_\_\_\_ Customer: \_\_\_\_\_

Project: \_\_\_\_\_

Type: \_\_\_\_\_ Qty: \_\_\_\_\_



Down 113 remodel is designed for recessed use and is characterized by the deeper position of the light source in relation to the ceiling level. The housing is made of silver grey or white powder coated galvanized steel and features ventilation slots at the backside for optimal air circulation. Down 113 remodel luminaires come with halogen, LED lamp sockets for customizable lighting options that are easily replaced in the field. Plaster-kits are available for applications in concrete ceilings.



## Construction

### Luminaire

Sheet steel, powder coated

### Finishes

- White (RAL 9016)
- Grey (RAL 9006)

### Mounting Options

Recess mounting in drywall, plaster, grid/ACT ceiling, or wood.

### Classifications

All Down 113 products are rated for indoor use only, in either a dry or damp location.

## Electrical Characteristics

**PAR 30 lamp socket** – 120V only (no transformer). Dimmable via line voltage. Check dimming compatibility with lamp chosen.

**AR111 lamp socket** – 120V or 277V (must specify) transformer to 12V. Dimmable via line voltage. Check dimming compatibility with lamp chosen.

**L(T5) lamp socket** – 24W.

**3X T4 bi-pin** – 12V.

Kreon recommends Soraa LED lamps for a high quality, energy efficient, field replaceable light source with customizable optic range and light output. Soraa LED lamps available from Kreon. Consult factory for details.

### Gear

For AR111 lamp socket, supplied with 120V or 277V to 12V transformer. Dimmable via line voltage. Dimming range dependent

### KREON STOCK PROGRAM:


ONLY SPECIFICATIONS SHOWN IN BLACK ARE AVAILABLE FOR THE STOCK PROGRAM.  
GREYED OUT SPECIFICATIONS ARE AVAILABLE BUT ARE SUBJECT TO STANDARD LEAD TIMES. PLEASE CONTACT FACTORY.

## Down 113 – 5" Wide Aperture Recessed w/Flange

Single, Double, or Triple Lamp Adjustable Luminaire (remodel installation)


### Ordering Codes

KU _____ -	3 _____ -	RF -	_____ -	120 _____ -
KREON DOWN 113	FINISH COLOR**	MOUNTING	CEILING TYPE	LINE VOLTAGE
<b>98812</b> – Single Module, AR111 socket (adjustable 360° x 25°) <b>98822</b> – Double Module, AR111 socket (adjustable 360° x 25°) <b>98130</b> – Triple Module, AR111 socket (adjustable 360° x 25°)	<b>1</b> – White <b>3</b> – Grey	<b>RF</b> – Recessed with flange	<b>DW</b> – Drywall/sheetrock <b>GR</b> – ACT panels with grid ceiling <b>OT</b> – Other, please consult factory	<b>120</b> – 120V only <b>277</b> – 277V only (PAR30 socket not available with 277V option)
Ordering Example: KU98813-1-SF-GR-120				
All Down 113 products are rated for indoor use only, in either a dry or damp location. Contact factory for more information.				
* PAR30 socket compatible with short neck lamps only				
** Consult factory for custom RAL finish color options.				

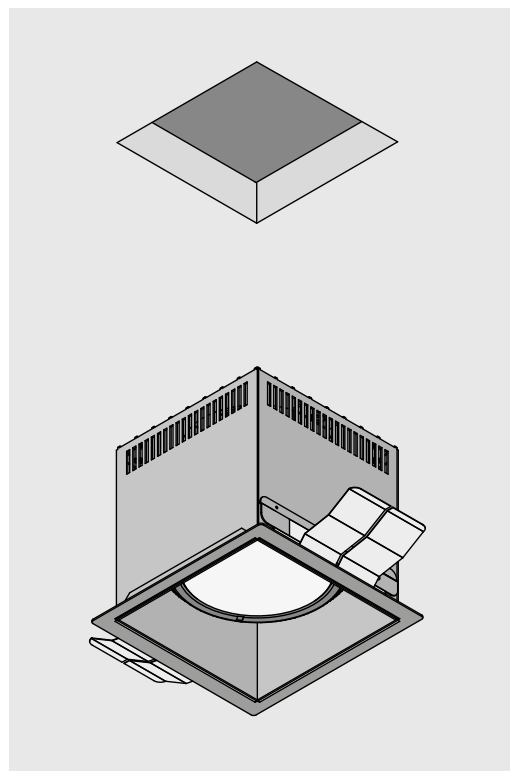

#### Construction

Schematic representation of assembly Down 113 (single module)

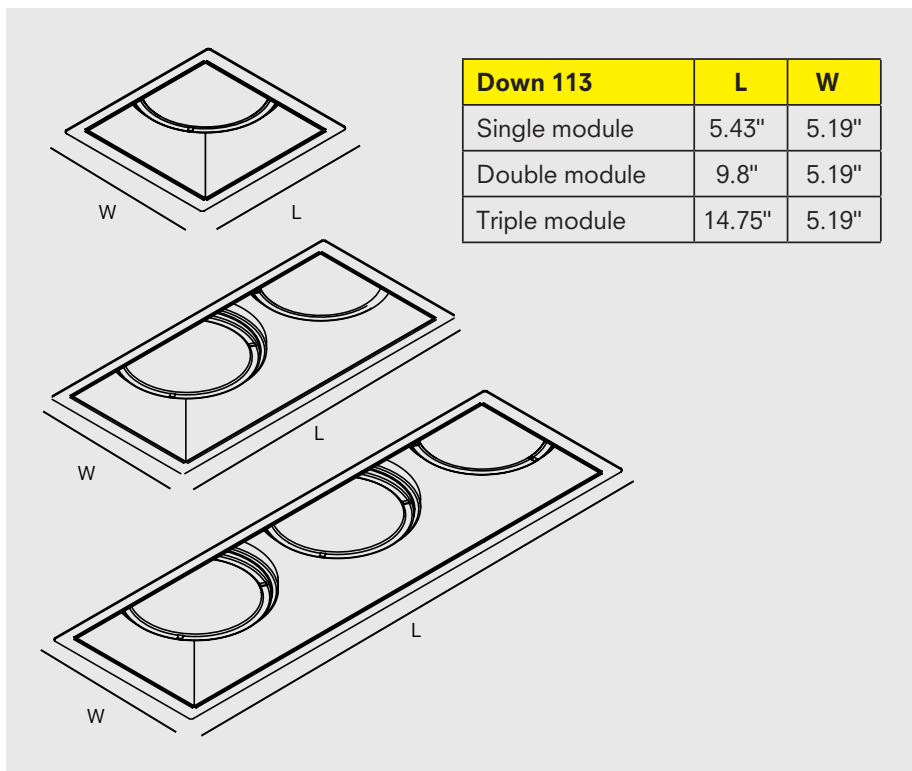

#### KREON STOCK PROGRAM:

ONLY SPECIFICATIONS SHOWN IN BLACK ARE AVAILABLE FOR THE STOCK PROGRAM.  
GREYED OUT SPECIFICATIONS ARE AVAILABLE BUT ARE SUBJECT TO STANDARD LEAD TIMES. PLEASE CONTACT FACTORY.



Down luminaires are ETL Listed for dry and damp locations.  
Down luminaires lend support for LEED credits and certification.