

kreon prologe 80 express

kreon prologe is a range of surface mounted cubic downlights characterized by a compact form and deep set LED position. kreon prologe express comes in three sizes to suit spatial requirements, providing a discreet yet functional solution to general or accent lighting within architecture. Finished in black for a dramatic ceiling contrast.






prologe 80 express LED MR16



prologe 80 express

kreon prologe 80 express

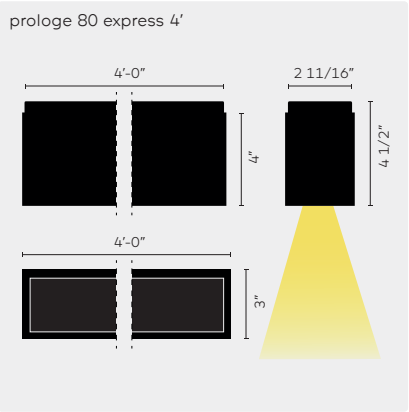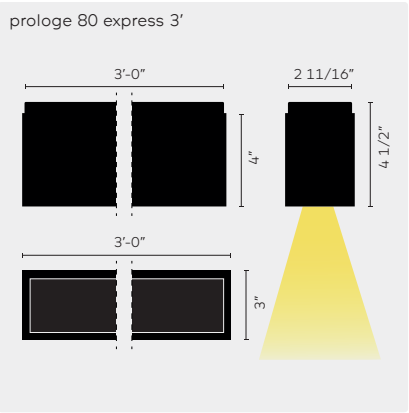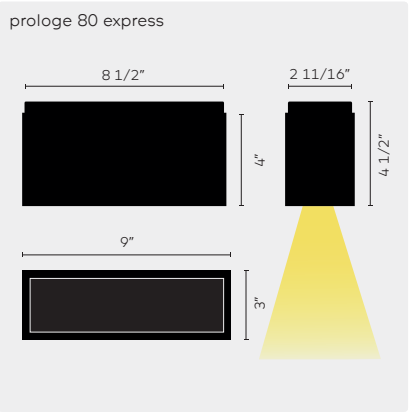

	Colour	KR-code	Light sources	9027 2700K, CRI90	9030 3000K, CRI90	Optional accessories
 prologe 80 express LED MR16 Gear: phase dim incl. lamp: excl.	●	<u>KR923212</u>	1			
 prologe 80 express 3' surface mount Gear: 0-10 or phase dim incl. matt diff. glass: incl.	●	<u>KR923242</u>	2	●	●	
	●	<u>KR923240</u>	2	●	●	
 prologe 80 express 4' surface mount Gear: 0-10 or phase dim incl. matt diff. glass: incl.	●	<u>KR923242</u>	2	●	●	
	●	<u>KR923240</u>	2	●	●	

**** contact factory for recessed or pendant versions**

		CRI	CCT	Voltage	Wattage	Delivered lumen
1	LED MR16 fitting GU5,3			120V	max. 2x10W	
2	LED	CRI90	2700K/3000K	120V	19W	635lm/ft