



## 1 dimensions

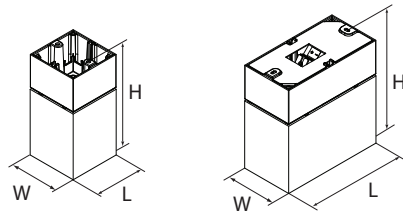


Name	Reference	LxWxH
Prologe 80 Single LED	KR967121-xxxx / KR967122-xxxx	150x75x75
Prologe 80 Double LED	KR967221-xxxx / KR967222-xxxx	150x75x155,5

Please make sure that main voltage is disconnected before proceeding! ⚡

## 2 installation




distance x for single : 54 mm  
double : 126 mm

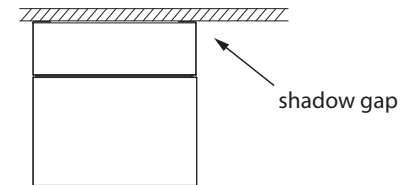


make a cut-out in the middle to push the gear through the ceiling: dimensions depend on the dimensions of the chosen gear, but cannot exceed 60mm x 35mm (for single) and 60x105mm (for double)

## 3 connection

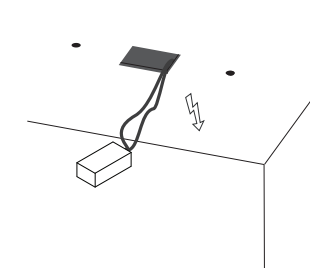


connect the 230V to the gear (with strain relief)


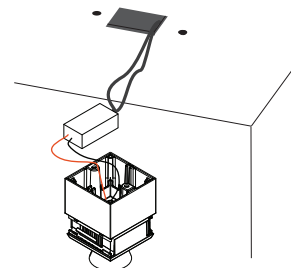


connect the LED directly to the gear

Name	Reference	Current
Prologe 80 Single LED	KR967121-xxxx / KR967122-xxxx	500mA
Prologe 80 Double LED	KR967221-xxxx / KR967222-xxxx	500mA

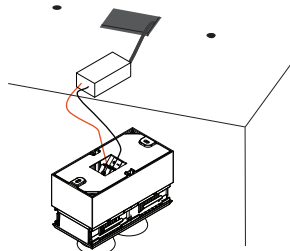

connect the wires to the connector on the prologe, red wire = +, black wire = - (+ and - are indicated)

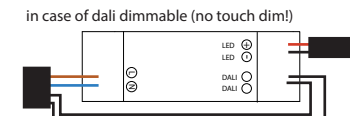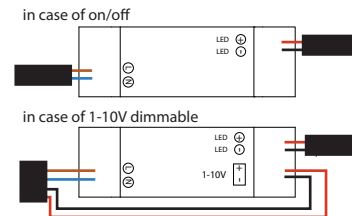


**IMPORTANT** : check polarity of the LED!!


+ and - at driver side must match  
+ and - at LED side

+ = red wire  
- = black wire


## connection

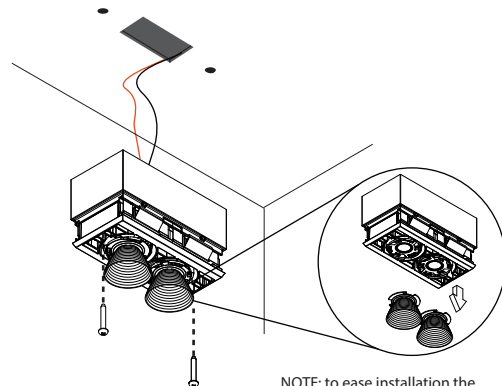


NOTE: to ease installation the reflectors can easily be taken out by rotating counter clockwise and then pulling down

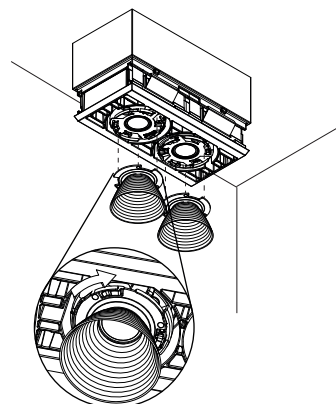

when installing the reflectors again, slide the bumps on the reflector under the cavities in the reflector holder

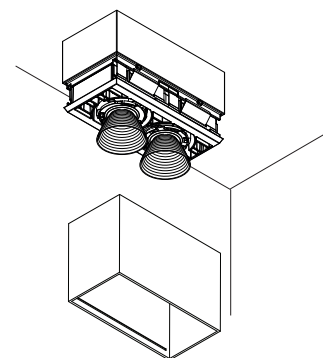


click the housing onto the ceiling box

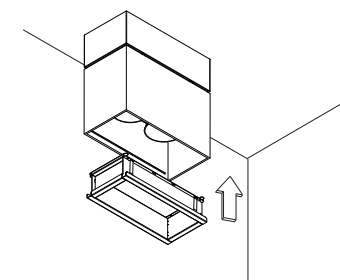


insert louvre in housing

5 | louvre


fix ceiling box to ceiling with screws

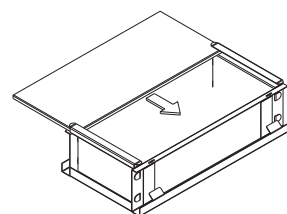


① slide the glass in the louvre.  
glass is optional

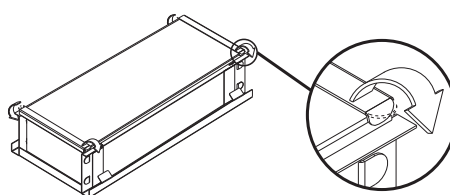

② fold lips around glass

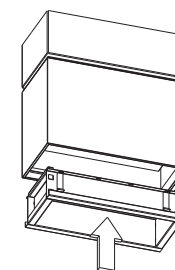

③ place louvre in device



click !

④ push louvre in until springs click

6 | accessories



7 | picture

kreon nv

Industrieweg Nood 1152  
3660 Opglabbeek  
Belgium

Tel + 32 89 81 97 80  
Fax + 32 89 81 97 90

www.kreon.com  
mailbox@kreon.be

Rev. date: 22/08/2016  
KR8670201946