

kreon ato

kreon ato provides a truly versatile lighting tool. It is a recessed indoor spotlight family for focused light. With single or double directional lampheads they, meet the needs of accent lighting requirements in residential environments, commercial premises and hospitality projects. kreon ato has a rotational adjustment of 360° and an angular adjustment of 30° which, when combined with the choice of high quality reflectors with faceted spherical smooth surfaces provides a truly versatile accent lighting tool. kreon ato single comes in two beam angles, flood (30°) and wide flood (40°) and can be additionally equipped with professional screening accessories. kreon ato twin has two lampheads with 30° flood optics than can be tilted independently.













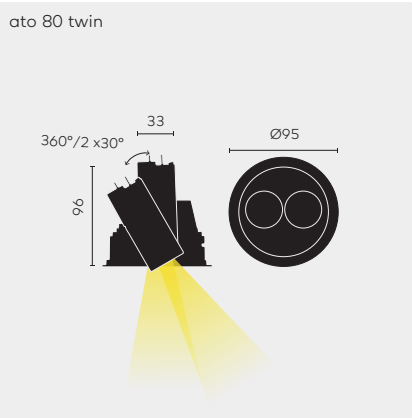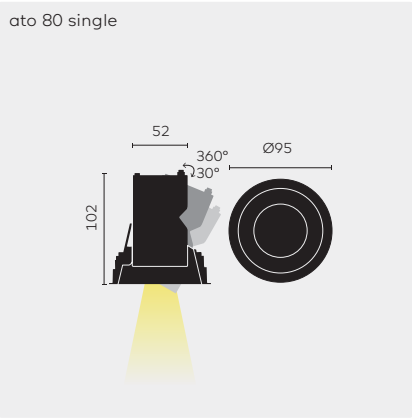





ato 80 single, black with copper lamphead and glare preventer



ato 80 twin, white with black lampheads





	Colour trim	KR-code	Light sources	9027 2700K, CRI90+	9030 3000K, CRI90+	FL Flood (30°)	WFL Wide flood (40°)	P1 White lamphead	P2 Black lamphead	A0 Chrome lamphead	A5 Red copper lamphead	Optional accessories
		KR937911	①	●	●	●	●	●	●	●	●	
		KR937912	①	●	●	●	●	●	●	●	●	
		KR937621	②	●	●	●	●	●	●			
		KR937622	②	●	●	●	●	●	●			
■ Optional accessories												
Plasterkit concrete		KR737702	Plasterkit for concrete installation									
Glare preventer (only for ato 80 single)		KR706721	Straight glare preventer, white, H30									
		KR706722	Straight glare preventer, black, H30									
		KR706720	Straight glare preventer, chrome, H30									
		KR706725	Straight glare preventer, red copper, H30									
Lenses ①		KR706070	Anti-glare louvre									
		KR706270	Diffusing lens									
Driver		KR772024	LED driver, 500mA, ON/OFF, 20W									
		KR772220	LED driver, 500mA, 1-10V, 20W									
		KR772126	LED driver, 500mA, DALI, 20W									
		KR772542	LED driver, 500mA, phase dimming, 18W									
		KR772229	LED driver, 500mA, Casambi, 27W									
		KR772034	LED driver, 700mA, ON/OFF, 20W									
		KR772232	LED driver, 700mA, 1-10V, 20W									
		KR772236	LED driver, 700mA, DALI, 18W									
		KR772931	LED driver, 700mA, phase dim, 14W									
		KR772239	LED driver, 700mA, Casambi, 36W									


		CRI	CCT	Wattage	Drive current	Fixture lumen
①	LED	CRI90+	2700K/3000K	12W	700mA	1150lm
②	LED	CRI90+	2700K/3000K	2 x 5,9W	500mA	2 x 325lm

REMARKS

① Lenses only in combination with a glare preventer. Max. 2 accessories per glare preventer.

Thickness boardmaterial:
9-26mm
Gear excluded.
⊕ IP20

Straight glare preventer



Plasterkit concrete

