

kreon erubo

kreon erubo is a range of architectural spotlights characterised by its simple geometric forms that contain LED light sources and electronic dimmable drivers.



kreon erubo is available in a range of outputs and colour temperatures and can be either individually mounted or installed on a flexible track system, providing an excellent solution for display lighting in homes, shops or galleries.



erubo, white



erubo on-track, black

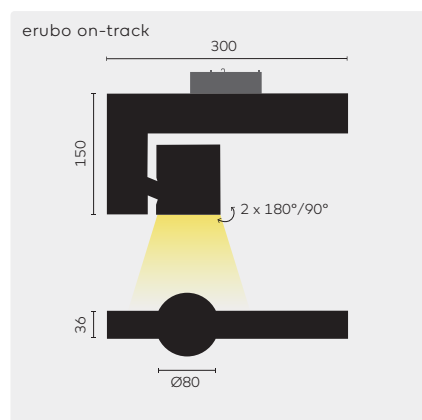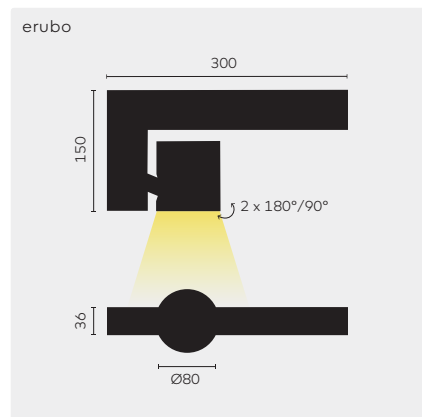

	Colour	KR-code	Light sources	8327 2700K, CRI83	8330 3000K, CRI83	9027 2700K, CRI90	9030 3000K, CRI90	9040 4000K, CRI90	9827 2700K, CRI98	9830 3000K, CRI98	SP Spot (12°)	FL Flood (24°)	WFL Wide flood (38°)	Optional accessories
erubo low output Gear: incl., phase dimming	○	KR921535	①	●	●	●	●	●	●	●	●	●	●	■
	●	KR921532	①	●	●	●	●	●	●	●	●	●	●	■
erubo high output Gear: incl., phase dimming	○	KR921635	②	●	●	●	●	●				●	●	■
	●	KR921632	②	●	●	●	●	●				●	●	■
erubo high output Gear: incl., 1-10v dimming	○	KR921645	③	●	●	●	●	●	●	●		●	●	■
	●	KR921642	③	●	●	●	●	●	●	●		●	●	■
erubo high output Gear: incl., DALI dimming	○	KR921655	③	●	●	●	●	●	●	●		●	●	■
	●	KR921652	③	●	●	●	●	●	●	●		●	●	■
erubo on-track low output Gear: incl., phase dimming	○	KR927535	①	●	●	●	●	●	●	●	●	●	●	■
	●	KR927532	①	●	●	●	●	●	●	●	●	●	●	■
erubo on-track high output Gear: incl., phase dimming	○	KR927635	②	●	●	●	●	●				●	●	■
	●	KR927632	②	●	●	●	●	●				●	●	■
erubo on-track high output Gear: incl., 1-10v dimming	○	KR927645	③	●	●	●	●	●	●	●		●	●	■
	●	KR927642	③	●	●	●	●	●	●	●		●	●	■
erubo on-track high output Gear: incl., DALI dimming	○	KR927655	③	●	●	●	●	●	●	●		●	●	■
	●	KR927652	③	●	●	●	●	●	●	●		●	●	■

■ Optional accessories

Lenses ②

KR762002 Anti-glare louvre

3~ circuit track

See page 550

	LED	CRI	CCT	Voltage	Wattage	Fixture lumen
①	SP	CRI83	2700K/3000K	230V	15,6W	1051lm
		CRI90	2700K/3000K/4000K	230V		
		CRI98	2700K/3000K	230V	19W	897lm
	FL & WFL	CRI83	2700K/3000K	230V	9,5W	1037lm
		CRI98	2700K/3000K	230V	13,3W	1037lm
②	LED	FL & WFL	CRI83	2700K/3000K	15,2W	1595lm
③	LED	FL & WFL	CRI83	2700K/3000K	19,1W	1595lm
			CRI90	2700K/3000K	19,1W	1595lm
	FL & WFL	CRI98	2700K/3000K	17,2W	1037lm	

REMARKS

① For track accessories, see page 484. In case of 1-10V or DALI, use track accessories with databus.

② One optional accessory.

Gear included.
IP40