


# kreon installation manual


## technics & dimensions

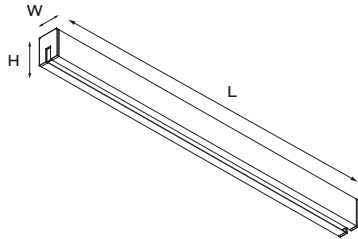


name	reference	voltage Vac	freq	current	nominal current	wattage	max power	power factor	LxWxH
Nuit standard 1x5 DALI	KR953x1x	220-240	50/60Hz	500mA	0,12A	6.9W	18W	0,95	750x42.5x60
Nuit standard 1x10 DALI	KR953x2x	220-240	50/60Hz	500mA	0,12A	13.8W	18W	0,95	750x42.5x60
Nuit standard 1x5 GEAR EXCL.	KR95350x	220-240	-	500mA	0,11A	6.9W			300x42.5x60

## 1. installation

electrical diagram

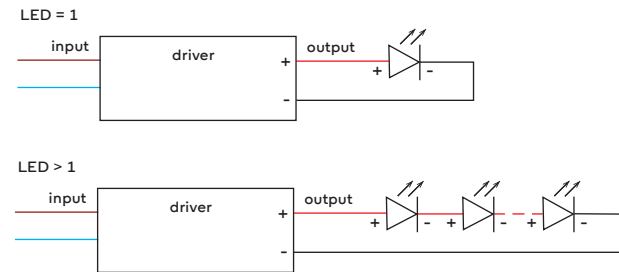


The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



Please make sure the main voltage is disconnected before proceeding!





The gear contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person




## 2. installation in case of surface mounting

Drill 2 holes (5mm) at the right distance

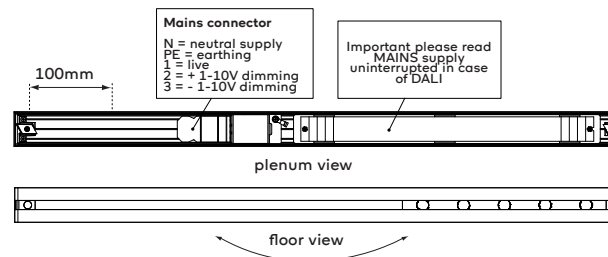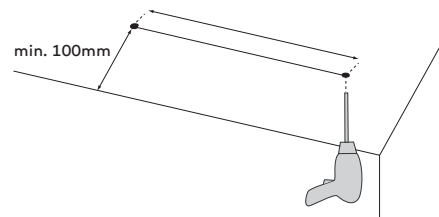


Apply correct wiring at 100mm from one of the holes. Mind the orientation of the fitting while applying the wiring!

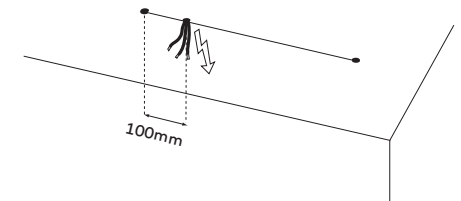


# kreon installation manual

## 3. installation in case of surface mounting


insert plugs

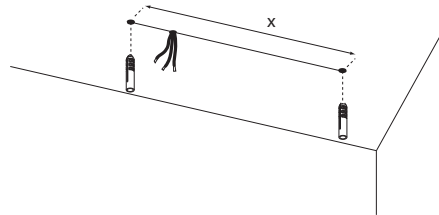

connect female connector with strain relief to  
power supply (gear incl.) or driver (gear excl)

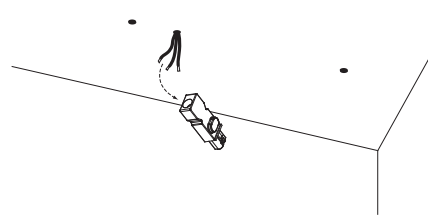


make electrical connection with male  
connector in luminaire


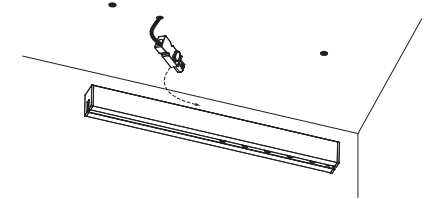


## 4. installation in case of surface mounting

fix luminaire to the ceiling

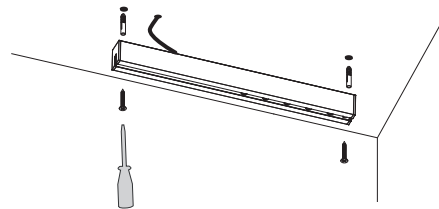


cover screw holes with supplied tube plugs

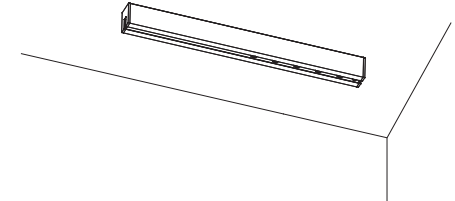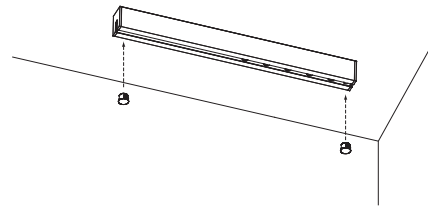


## 5. installation in case of recessed mounting


after installation of the plasterkit  
or recessed profile, follow next steps

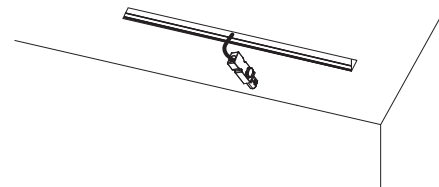

use the supplied parallelogram shaped nuts  
and screw with countersunk heads

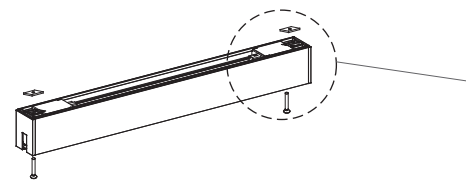

set the nut on to top of the screw

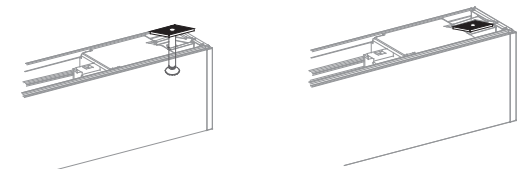


# kreon installation manual


## 6. installation

### in case of recessed mounting


make correct connection with male connector in luminaire

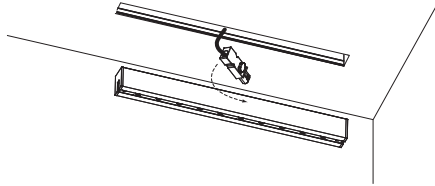

fix luminaire in the installed recessed profile

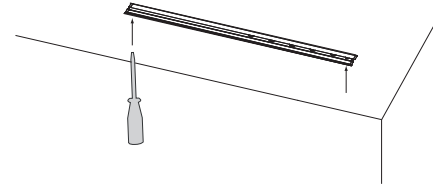

cover screw holes with supplied tube plugs

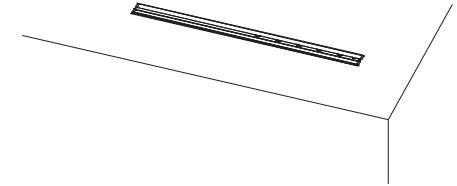

## 7. pictures



# kreon light source information

Fixture reference	LED reference	Energy Efficiency Class	QR-code	EPREL link
KR95351X-9027-XX-XX KR95352X-9027-XX-XX KR95350X-9027-XX	KR7000102594	F		<a href="https://eprel.ec.europa.eu/qr/998827">https://eprel.ec.europa.eu/qr/998827</a>
KR95351X-9030-XX-XX KR95352X-9030-XX-XX KR95350X-9030-XX	KR7000102568	F		<a href="https://eprel.ec.europa.eu/qr/998755">https://eprel.ec.europa.eu/qr/998755</a>
KR95351X-9040-XX-XX KR95352X-9040-XX-XX KR95350X-9040-XX	KR7000102847	F		<a href="https://eprel.ec.europa.eu/qr/998709t">https://eprel.ec.europa.eu/qr/998709t</a>