



kreon lini

Continuous linear light is an essential tool for architects and lighting designers. The kreon lini range provides solutions for all kinds of applications. A recessed LED line on the bevelled edge provides homogeneous and dot-free illumination. The slim kreon lini 10 with a recessed silicone diffuser produces a sustained soft light distribution and can be used as a graphic play of light or guide light.





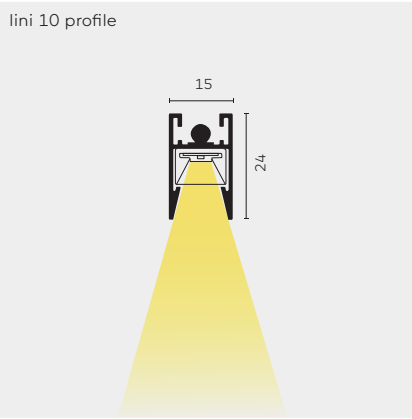



lini 10 profile ①

Gear: excl.

	CRI	CCT	Voltage	Wattage	Fixture lumen
① LED	CRI90	2700K/3000K	24V	14,4W/m	512lm/m


REMARKS


- ① Profile lenght needs to be optimised in steps of 50mm. Length to be configured. No dark spots allowed. No more than 5m can be powered in series, longer lengths to be connected to the power supply in parallel. Use power supply on remote. Minimum 111mm, maximum lenght of a single run profile 2961mm, profile sections can be connected.
- ② Sold per 5 pieces. In case of surface mounted use 2 clips per meter.
- ③ Plasterkit profile should be finished with polyester gypsum. Possible thickness of board material: 12.5/15/18mm.





Profiles are supplied pre-assembled.
♦ IP44

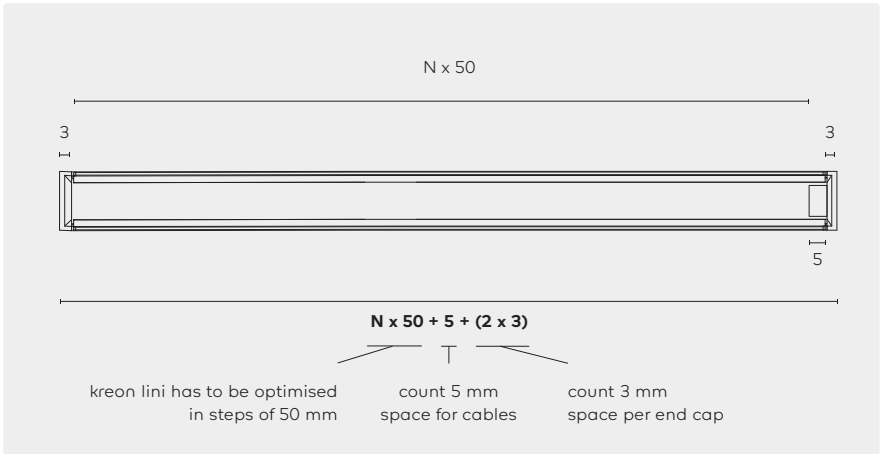Use this formula to configure the length of the profile:
N x 50mm + 5mm + (2 x 3mm)

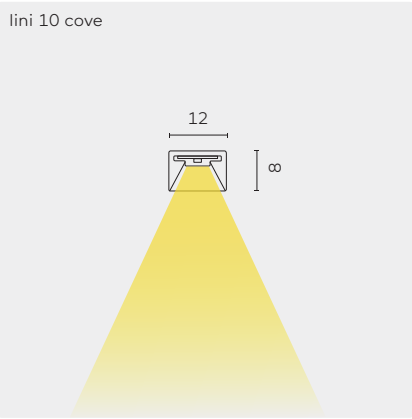For profiles in multiple sections, please contact your kreon sales representative or one of the kreon offices.





		KR-code	Light sources			Optional accessories
 lini 10 cove ① Gear: excl.		<u>KR774111</u>	①			
■ Optional accessories						
Power supply		<u>KR490373</u>	LED power supply 24VDC/30W			
		<u>KR772070</u>	LED power supply 24VDC/60W			
		<u>KR490375</u>	LED power supply 24VDC/100W			
		<u>KR490376</u>	LED power supply 24VDC/150W			
Controller		<u>KR774006</u>	DALI 24V controller			
		<u>KR774106</u>	1-10V controller			

		CRI	CCT	Voltage	Wattage	Fixture lumen
①	LED	CRI90	2700K/3000K	24V	14,4W/m	954lm/m


REMARKS


① Profile lenght needs to be optimised in steps of 50mm. Length to be configured. No more than 5m can be powered in series, longer lengths to be connected to the power supply in parallel. Use power supply on remote. Minimum 55mm, maximum lenght of a single run profile 3005mm. Double sided tape is included.







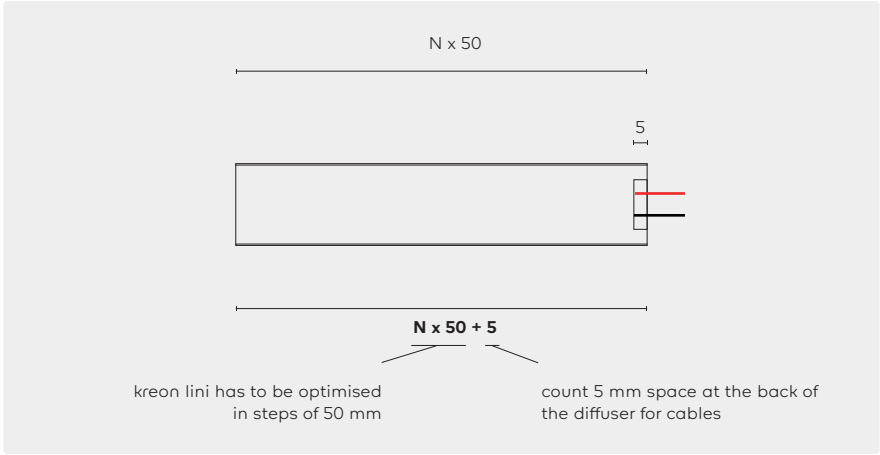

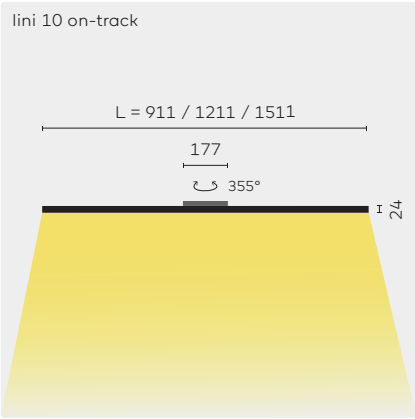






















Profiles are supplied pre-assembled.
◆ IP44

Use this formula to configure the length of the profile:
 $N \times 50\text{mm} + 5\text{mm}$

For profiles in multiple sections, please contact your kreon sales representative or one of the kreon offices.





<div> lini 10 on-track 1 Gear: incl.</div>													
Colour	KR-code	Light sources	9027 2700K, CRI90+	9030 3000K, CRI90+	SW Switchable ON/OFF	VD 1-10V dimming	DD DALI dimming	09 Length 911 mm	12 Length 1211 mm	15 Length 1511 mm	Optional accessories		
	<u>KR974811</u>	①											
	<u>KR974812</u>	①											
	<u>KR974814</u>	①											
■ Optional accessories													
Low voltage track		See page 440											

		CRI		CCT	Voltage	Wattage	Fixture lumen
①	LED	09	CRI90	2700K/3000K	48V	15,5W	466lm
		12	CRI90	2700K/3000K	48V	17,3W	620lm
		15	CRI90	2700K/3000K	48V	21,6W	774lm

REMARKS

① Use in combination with a 48V low voltage track system (see page 440).

◆ IP40