


# kreon    side

The kreon side concept originated from the need to provide ambient and placement lighting from within vertical surfaces.

The faceted reflectors ensure a uniform asymmetrical beam without sharp edges or hotspots. They also provide a wash of light that, when mounted downward, can provide orientation through spaces, or when mounted upwards, produce a ceiling glow that effectively increases ambient levels within an interior.



A soft yet striking light beam and the steep bevel of the finishing louvre draws attention to the straight vertical back surface which can be finished in various materials according to the designer's preference. kreon side, available in widths of 25, 40 and 80 mm can be merged perfectly into the architecture and combined with other kreon luminaires.

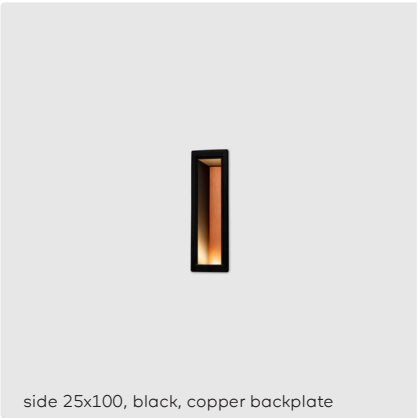

side 25x100, black, copper backplate



side 40x100, black, grey backplate



side 40x200, white, white backplate












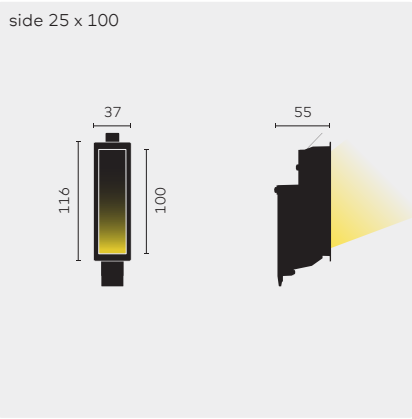





















side 80x200, white, bronze backplate









		Colour louvre	KR-code	Light sources	9027 2700K, CRI90+	9030 3000K, CRI90+	P1 Painted white backplate	P2 Painted black backplate	A2 Alu black backplate	A3 Alu grey backplate	A4 Alu bronze backplate	A5 Copper backplate	A6 Alu red backplate	Optional accessories	
	<b>side 25 x 100</b> Gear: excl., IP20 		<u>KR932111</u>	①											
			<u>KR932112</u>	①											
■ <b>Optional accessories</b>															
Concrete plate			<u>KR732113</u>	Concrete plate for side 25 x 100  LxW 190x70 D 60											
Concrete installation box			<u>KR775124</u>	Concrete installation box for side 25 x 100  LxW 200x110 D 60											
Removal tool			<u>KR775002</u>	Removal tool for side 25 											
Driver			<u>KR772820</u>	LED driver, 500mA, ON/OFF, 11W 											
			<u>KR772220</u>	LED driver, 500mA, 1-10V, 20W 											
			<u>KR772823</u>	LED driver, 500mA, DALI, 20W 											


REMARKS

① Removal tools serves to remove the luminaire after installation. One tool per project is recommended.  
② Driver fits in the concrete plate of kreon side 25x100.


Thickness boardmaterial: 9-12,5mm  
Cut-out dimensions for hollow wall. For other applications, see installation manual.

**Installation possibilities**  
Recommended for seamless installation in stone wall: concrete plate  
  
Recommended for seamless installation in concrete wall: concrete plate + installation box



Installation possibilities

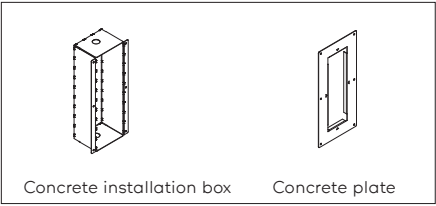




Removal tool

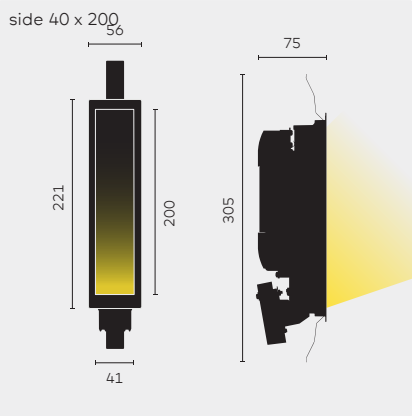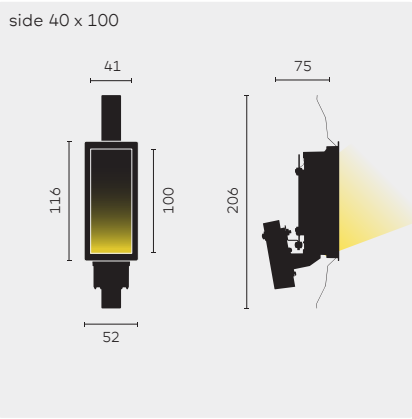

kreon side 40



 <b>side 40 x 100</b> Gear: excl., IP55 ❶	 <b>side 40 x 200</b> Gear: excl., IP55 ❶	 <b>side 40 x 200</b> Gear: incl., IP20
■ Optional accessories		
Concrete plate		
Concrete installation box		
Removal tool		
Driver for side 40x100 gear excl.		

Colour louvre	KR-code	Light sources	9027 2700K, CRI90+	9030 3000K, CRI90+	SW Switchable ON/OFF	DD DALI dimming	P1 Painted white backplate	P2 Painted black backplate	A2 Alu black backplate	A3 Alu grey backplate	A4 Alu bronze backplate	A5 Copper backplate	A6 Alu red backplate	Optional accessories
○	<a href="#">KR932311</a>	❶	●	●			●	●	●	●	●	●	●	■
●	<a href="#">KR932312</a>	❶	●	●			●	●	●	●	●	●	●	■
○	<a href="#">KR932411</a>	❶	●	●			●	●	●	●	●	●	●	■
●	<a href="#">KR932412</a>	❶	●	●			●	●	●	●	●	●	●	■
○	<a href="#">KR932511</a>	❷	●	●	●	●	●	●	●	●	●	●	●	■
●	<a href="#">KR932512</a>	❷	●	●	●	●	●	●	●	●	●	●	●	■

<a href="#">KR732313</a> Concrete plate for side 40 x 100 ③ LxW 190x90 D 80		
<a href="#">KR732413</a> Concrete plate for side 40 x 200 ③ LxW 290x90 D 80		
<a href="#">KR775324</a> Concrete installation box for side 40 x 100 ③ LxW 200x110 D 85		
<a href="#">KR775424</a> Concrete installation box for side 40 x 200 ③ LxW 300x110 D 85		
<a href="#">KR775004</a> Removal tool for side 40 ❷		
<a href="#">KR762700</a> LED driver, 700mA, ON/OFF, max. 11W ❸		
<a href="#">KR772232</a> LED driver, 700mA, 1-10V, max. 20W ❸		
<a href="#">KR752733</a> LED driver, 700mA, DALI, max. 20W ❸		

		CRI	CCT	Voltage	Wattage	Drive current	Fixture lumen
❶	LED	CRI90+	2700K/3000K		4W	700mA	242lm
❷	LED	CRI90+	2700K/3000K	230V	4W		242lm


REMARKS

- ❶ Suitable for damp locations and ventilated outdoor facades. Cannot be used in bathtub or shower areas, or in maritime environments.
- ❷ Removal tools serves to remove the luminaire after installation. One tool per project is recommended.
- ❸ Driver fits in the concrete plate of kreon side 40x200.


Thickness boardmaterial: 9-12,5mm  
Cut-out dimensions for hollow wall. For other applications, see installation manual.




**Installation possibilities**  
Recommended for seamless installation in stone wall: concrete plate

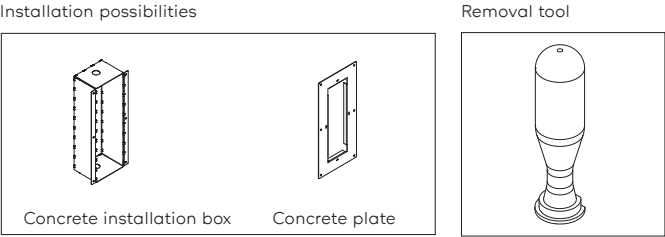Recommended for seamless installation in concrete wall: concrete plate + installation box

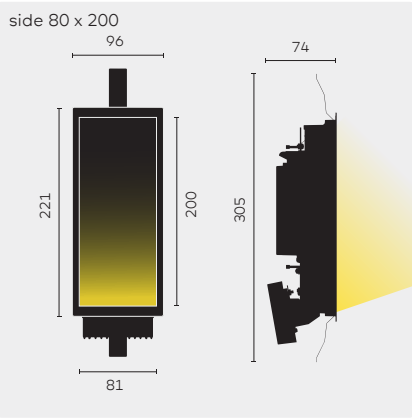

kreon    side 80



	<b>side 80 x 200</b> Gear: incl., IP20																			
		○	KR932611	①	●	●		●	●	●	●	●	●	●	●	●	●	●	■	
		●	KR932612	①	●	●		●	●	●		●	●	●	●	●	●	●	■	
	<b>side 80 x 200</b> Gear: incl., IP55 ①																			
		○	KR932601	①	●	●		●				●	●	●	●	●	●	●	■	
		●	KR932602	①	●	●		●				●	●	●	●	●	●	●	■	
	<b>side 80 x 200</b> Gear: excl., IP55 ♦ ①																			
		○	KR932601	②	●	●	●					●	●	●	●	●	●	●	■	
		●	KR932602	②	●	●	●					●	●	●	●	●	●	●	■	

■ Optional accessories

Concrete plate	KR732613	Concrete plate for side 80 ② LxW 290x130 D 80
Concrete installation box	KR775624	Concrete installation box for side 80 ② LxW 300x150 D 85
Removal tool	KR775008	Removal tool for side 80 ②
Driver	KR772024	LED driver, 500mA, ON/OFF, 20W
	KR772220	LED driver, 500mA, 1-10V, 20W
	KR772126	LED driver, 500mA, DALI, 18W

		CRI	CCT	Voltage	Wattage	Drive current	Fixture lumen
①	LED	CRI90+	2700K/3000K	230V	8,25W		613lm
②	LED	CRI90+	2700K/3000K		8,25W	500mA	613lm


REMARKS

① Suitable for damp locations and ventilated outdoor facades. Cannot be used in bathtub or shower areas, or in maritime environments.  
② Removal tools serves to remove the luminaire after installation. One tool per project is recommended.

Thickness boardmaterial: 9-12,5mm  
Cut-out dimensions for hollow wall. For other applications, see installation manual.

**Installation possibilities**  
Recommended for seamless installation in stone wall: concrete plate  
  
Recommended for seamless installation in concrete wall: concrete plate + installation box

Installation possibilities

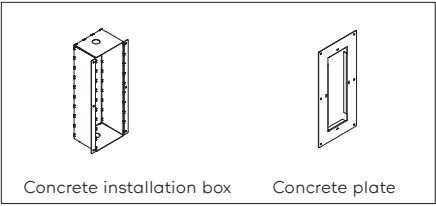

Removal tool

