

kreon stripe

kreon stripe 25 is a truly versatile semi-recessed ceiling luminaire characterised by a compact form hosting a single or double deepset downlight or a single wallwasher.

kreon stripe 25 combines small rhythmic pools of accent lighting with homogeneous wall washing light effects.

High efficient optics developed by System Bartenbach provide efficient, glare free light and even light distribution. Finished in black for a dramatic contrast or pure white to disappear in the surrounding architecture.



stripe 25 single, white






stripe 25 double, black



stripe 25 wallwasher, black

kreon stripe 25

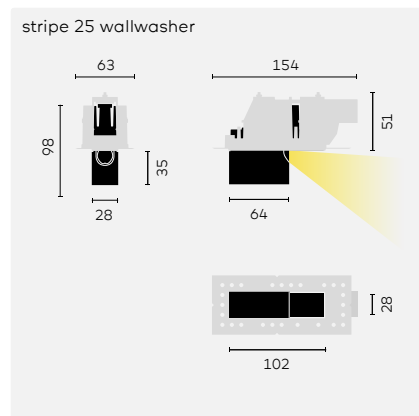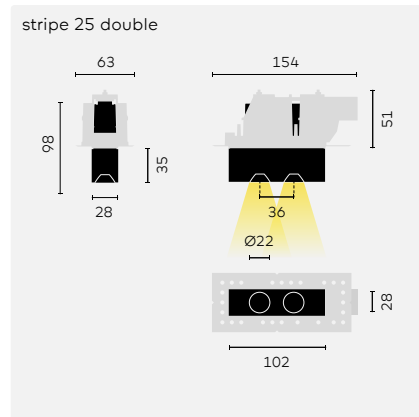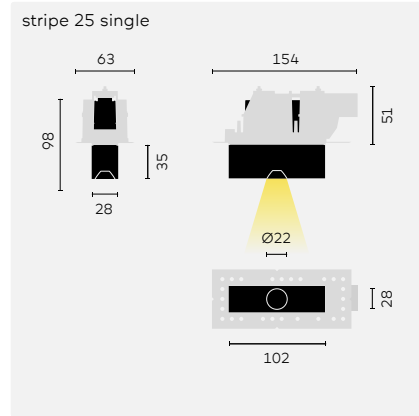

stripe 25 single
 Ø LxW 124x51 D 65
 Gear: excl., IP20

stripe 25 single
 Ø LxW 124x51 D 65
 Gear: excl., IP20

stripe 25 double
 Ø LxW 124x51 D 65
 Gear: excl., IP20

stripe 25 double
 Ø LxW 124x51 D 65
 Gear: excl., IP20

stripe 25 wallwasher
 Ø LxW 124x51 D 65
 Gear: excl., IP20

Required accessories

Plasterkit	KR739000	Plasterkit
Concrete installation box	KR775124	Concrete installation box
Concrete plate	KR775123	Concrete plate

Optional accessories

Driver for light sources ① ③ ⑤	KR762700	LED driver, 700mA, 11W, ON/OFF
	KR772232	LED driver, 700mA, 20W, 1-10V ①
	KR752733	LED driver, 700mA, 10W, DALI
Driver for light sources ② ④	KR739104	LED driver, 350mA, 15W, ON/OFF
	KR739102	LED driver, 350mA, 15W, 1-10V ①
	KR739106	LED driver, 350mA, 10W, DALI

	CRI	CCT	Wattage	Drive current	Fixture lumen
① LED	CRI90+	2700K/3000K	2W	700mA	172lm
② LED	CRI90+	2700K/3000K	4,2W	350mA	255lm
③ LED	CRI90+	2700K/3000K	4W	700mA	335lm
④ LED	CRI90+	2700K/3000K	8,3W	350mA	455lm
⑤ LED	CRI90+	2700K/3000K	4W	700mA	276lm

Colour	KR-code	Light sources	9027 2700K, CRI90+	9030 3000K, CRI90+	SP spot (15°)	DL dark light (36°)	WDL wide dark light (60°)	Required accessories	Optional accessories
○	KR939001	①	●	●	●			■	■
●	KR939002	①	●	●	●			■	■
○	KR939101	②	●	●		●	●	■	■
●	KR939102	②	●	●		●	●	■	■
○	KR939201	③	●	●	●			■	■
●	KR939202	③	●	●	●			■	■
○	KR939301	④	●	●		●	●	■	■
●	KR939302	④	●	●		●	●	■	■
○	KR939401	⑤	●	●				■	■
●	KR939402	⑤	●	●				■	■

REMARKS

① Driver must be placed on remote

Gear excluded
IP20

Installation possibilities

Required for installation in hollow wall: plasterkit

Required for installation in stone wall: concrete plate and plasterkit

Required for installation in concrete wall: installation box, concrete plate and plasterkit

Installation possibilities

