

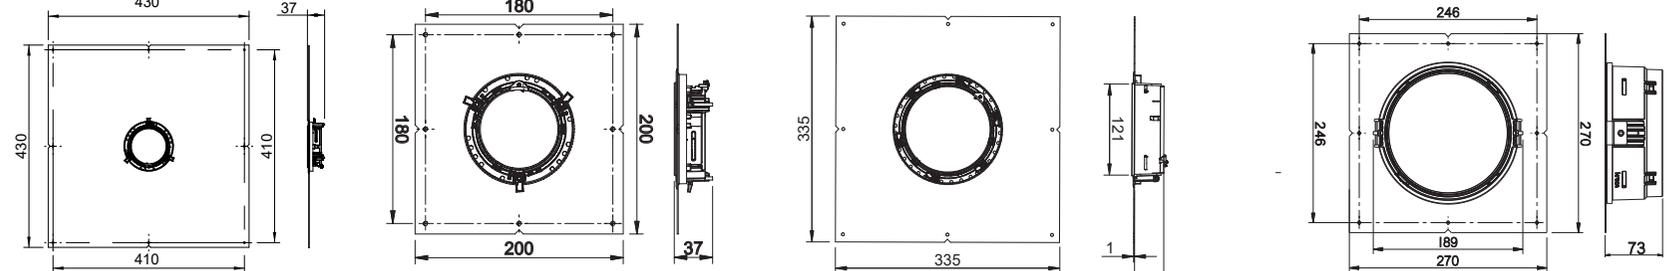
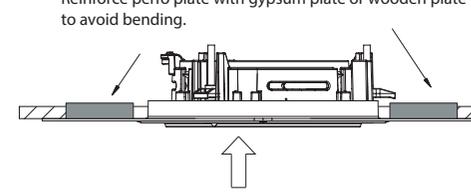
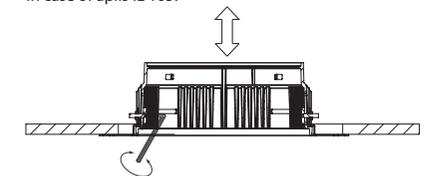

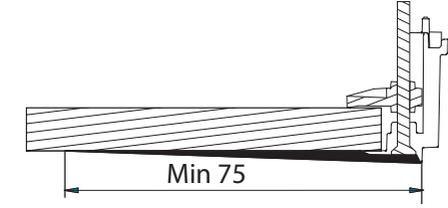


	technics	<p>In case of precast concrete panels, gear inclusive.</p>  <p>In case of finished concrete ceiling, gear exclusive.</p> 	Name	Reference	Lamp type	ØA	E	F	G	ØB	D			
1	cut out	<p>** Mind that the driver dimensions WxH cannot exceed 67x29,5mm! the length of the driver determines G as it has to be pushed perpendicular through the plasterkit. Depth = length of the driver + 30mm (in case of Holon 80 when the standard drivers KR77223x G = 130mm)</p>	Concrete plasterkit aplis IL 80 (shadow gap)	KR717101 (9)	QR-CBC51	140	320	320	200	170	130			
			(small)	(2)	LED dir (Kr91773x)	140	300	300	157	170	140			
			(shadow gap - small)	(7)	LED dir (Kr91793x, HE(Kr917X23))	140	344	344	120	390	115			
					LED fixed, WW (Kr91733x, Kr91703x)	140	260	260	100	250	100			
					Audio	140	200	200	130	150	130			
					Diapason 40/80/120 base LED	140	260	260	70**	110	70			
					Holon 80 directional LED	140	260	260	X**	110	60			
					ATO in-line 80	140	300	300	157	170	140			
					Concrete plasterkit aplis IL 120 (shadow gap)	KR707201 (9)	LED dir., fixed, wallwasher	140	350	350	150	305	200	
							LED low	140	390	390	150	305	237	
							Concrete plasterkit aplis IL 165 (shadow gap)	KR717201 (9)	QT12-ax	200	200	450	200	195
									QR-LP111	200	200	450	230	210
						HIT_TC	200	200	450	230	210			
						HIR-CE111	200	200	450	230	210			
						LED dir.	200	280	450	230	210			

2	dimensions				
		Aplis in-line 80	Aplis in-line 80 (small concr. Plasterkit)	Aplis in-line 120	Aplis in-line 165

3	installation	<p>Reinforce perfo plate with gypsum plate or wooden plate to avoid bending.</p> 		<p>In case of aplis IL 165.</p> 
		Put the plasterkit through the hole.	Fix the plasterkit with screws.	Align the box with the plasterboard using the thumb screw. Fix these screws with a hexagon screw key.

4	installation	<p>In case of 80 range please make sure that sticker is removed before proceeding!</p> 		
		Fill around perimeter of plasterkit using suitable filler and plaster to hide screws and plasterkit.	Minimum filler distance, spread out until zero.	