
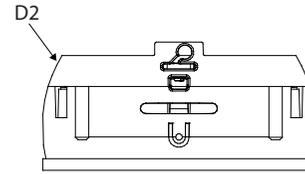
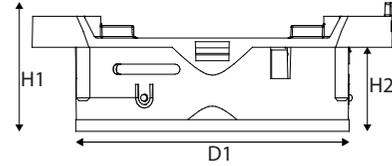


kreon installation manual


technics & dimensions

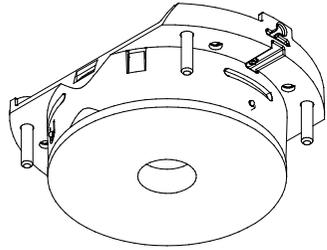

name	reference	H1	H2	D1	D2
installation kit, size 80, trimless finish	KR717100	38.2	25	82	82

- * in case of standard driver(KR772024/ KR772022/KR772122) which needs to be pushed through the plasterkit in case of driver placed at distance (doesn't need to be pushed trough the plasterkit) D/Gmin = 60 in case of a different driver, the installation depth D/Gmin = length of driver + 30mm
- ** installation depth D in case the driver is placed at a distance, so doesn't need to be pushed through the plasterkit
- *** installation depth G is in case the driver has to be pushed through the plasterkit in order to be close to the fixture mind that the drives dimensions WxH cannot exceed 79x29,5mm
the length of the driver determines G as it has to be pushed perpendicular through the plasterkit
depth = length of driver + 30mm


1. installation

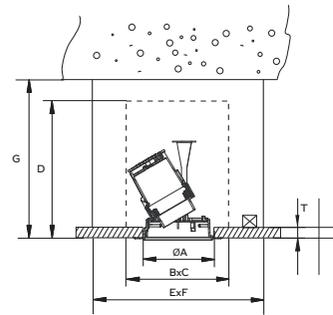


name	reference	lamp type	ØA	BxC	D _{min}	ExF	G _{min}	T _{min-Tmax}
installation kit ø80	KR717100	QR-CBC51	83	170x170	130	320x320	200	9-26
		LED dir.	83	170x170	140	300x300	157	9-26
		LED dir., HE	83	150x150	115	344x344	120	9-26
		Fixed, WW	83	200x200	100	260x260	100	9-26
		Audio	83	150x150	130	200x200	130	9-26
		Dir. / LED MR16		191x191	110	350x350	110	9-26
		Dir. / LED PAR16		176x176	130	330x330	130	9-26
		Diapason 40/80/120bas		110x110	70*	110x110	70*	9-26
		Holon 80 directional rec.		110x110	60**	110x110	x***	9-26
		ATO 80 in-line		Ø150	110	300x300	157	9-26
		Oran in-line		110x110	100	300x300	100	9-26
		Inti		115x115	110	300x300	157	9-26

ExFxG: min dimension for cooling, gear inclusive
BxCxD: min dimension for rotation
(can be applied with non combustable matter, gear exclusive)

2. installation

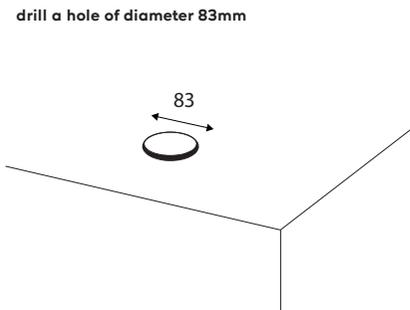


installation height can be adjusted by the 4 screws

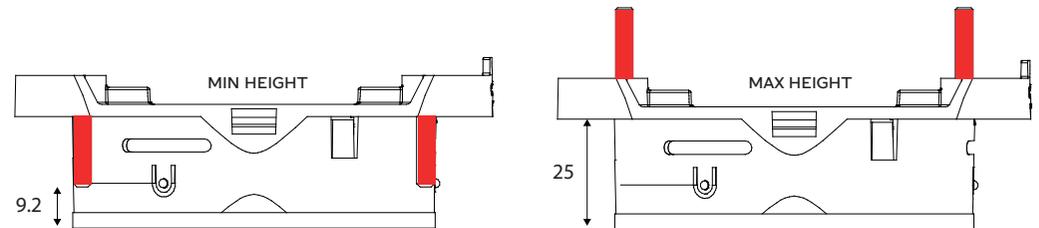


kreon installation manual

3. installation


use caulk on these 2 areas of the installation kit to fix it to the ceiling

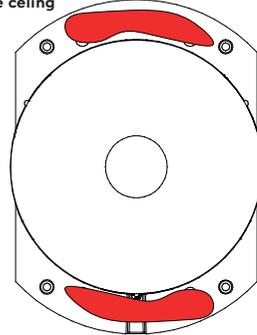

push installation kit through the hole

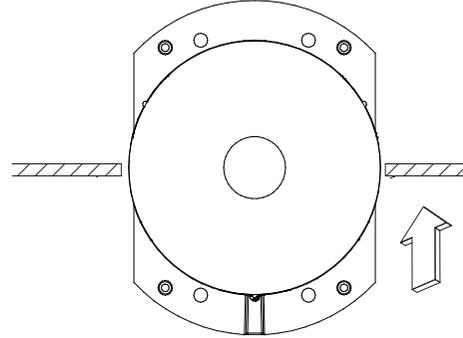


turn the installation kit

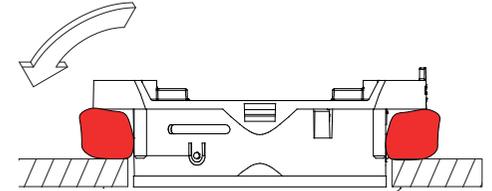


4. installation

ALTERNATIVE FIXING OPTION

when ceiling is accessible from the top, installation kit can be mounted from above




fix installation kit with 4 screws

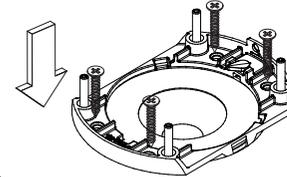


5. installation


Take out styrofoam part.
This part can be thrown away

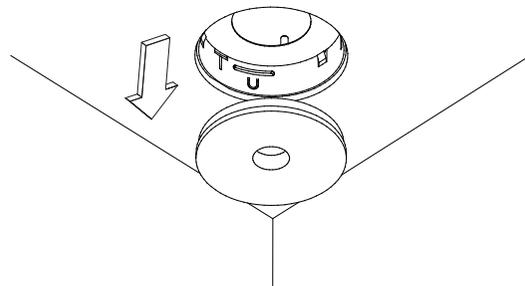

Take out the black ring by pushing the springs



place module in installation kit

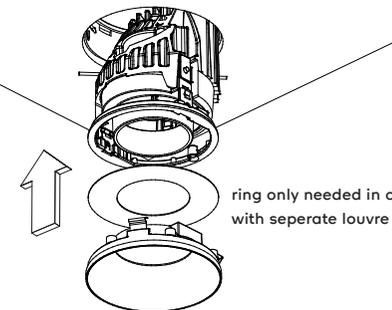

ring only needed in combination with separate louvre