



kreon installation manual

technics & dimensions

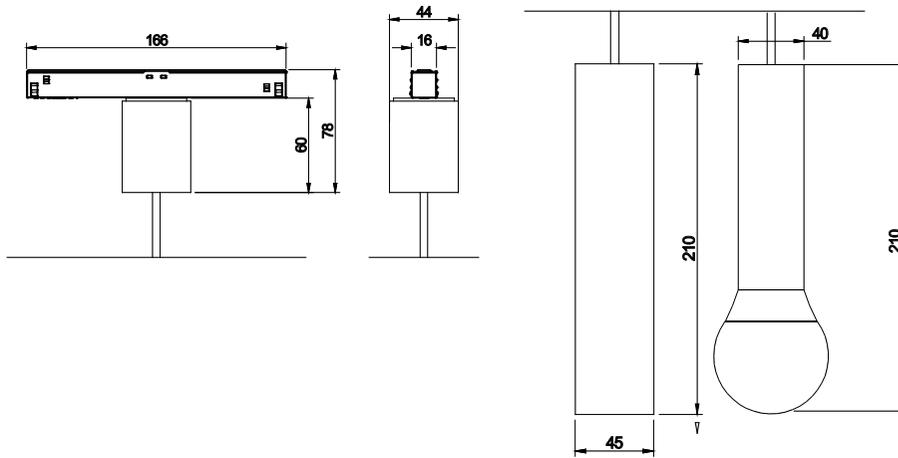


name	reference	voltage
holon 40 pendant on track	KR94540x-xxxx-xx-xx	48VDC
oran sphere blub on track	KR99192x-xxxx-xx	48VDC


1. installation

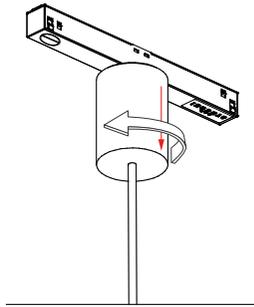


To change the cable length, unscrew the cable box

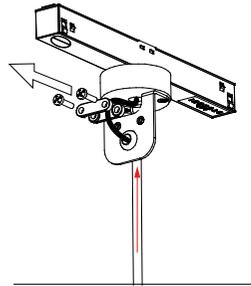


Unscrew cable clamps

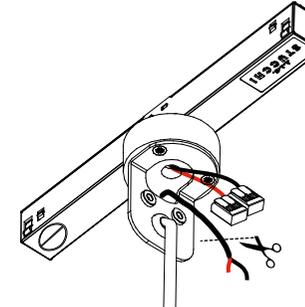


Disconnect cables from pendant cable and cut cable to correct length

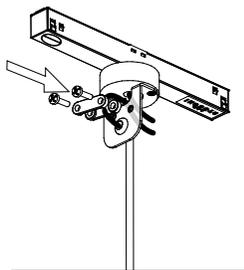

Pull the cable after the loop and strip the cables

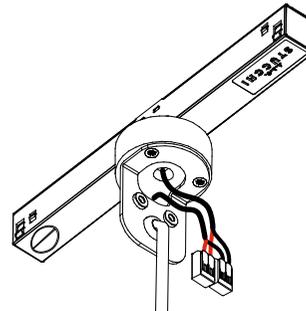


Connect cables by using connectors
Mind the polarity (+ is red, - is black)

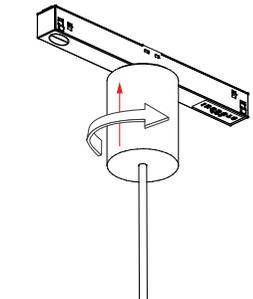


Screw cable box on adaptor

kreon installation manual

installation

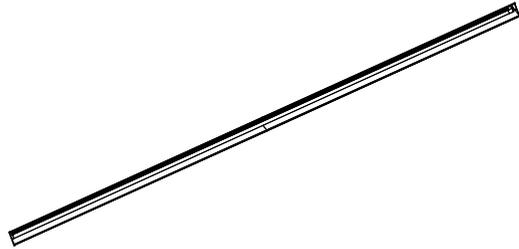

Install the Stucchi low voltage track as prescribed and feed it 48V


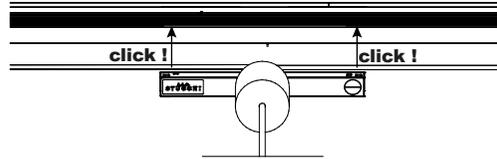


Click the fixture into the track, orientation is not important

Precaution in case of fixtures with 1-10V dimming!


- It's not recommended to use 1-10V fixtures without connecting the 1-10V dimming cables on the track.
- It's not recommended to use 1-10V passive dimming on the 48V track, active dimming is preferred.
- If the 1-10V fixtures on the track don't function:
Take all of them out and mount them again one by one.
The moment a fixture causes a malfunction, take it out and rotate the adapter 180°, in case of passive dimming the polarity needs to be the same on all fixtures.

installation

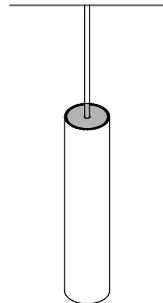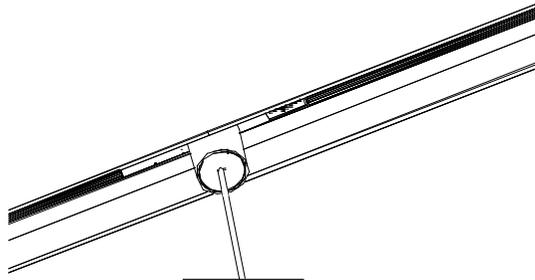


Remove cardboard on top of holon.
This was for protection during installation.


installation

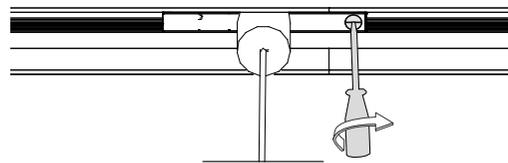

To remove the module, use a screwdriver

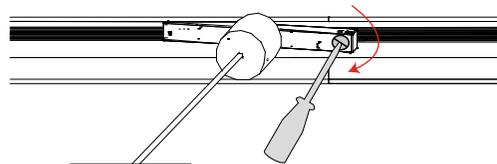

Turn in the slot of the adapter to unlock
adapter on one side

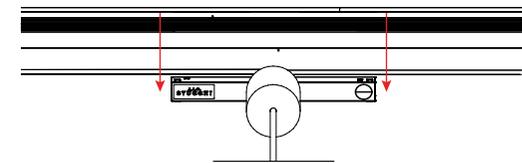

Pull the module from the track