


kreon fuga comes in 2 dimensions: 900 and 1200. By combining the head, the pendant bar and the ceiling bar, different combinations can be configured. The lower horizontal bar includes a CRI85, 2700K or 3000K LED-strip with diffuser for homogenous light output. This bar can be repositioned to an offset position or in the middle of the vertical bar. The additional possibility to rotate the lower horizontal bar by 90° makes kreon fuga a dynamic pendant luminaire.



general information		
application	surface-mounted luminaire for ceilings	
IP classification	40	
input voltage	230V	
illuminant (per lamphead)		
output fuga 900	447lm	
output fuga 1200	578lm	

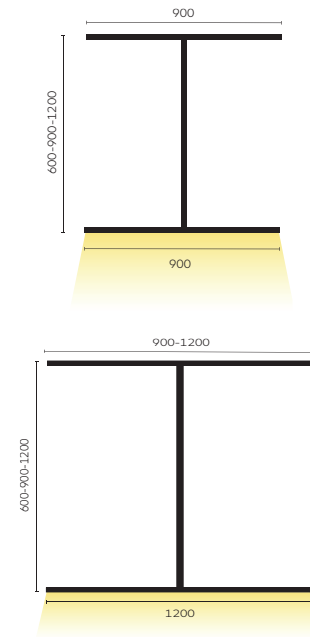

Ordering Codes

KR____-	__-	__-	__-	__
basic code	CCT-CRI	dim protocol	pendant	base
KR974262 - fuga 900, black KR974362 - fuga 1200, black	8527 8530	SW - on off	06 - 600mm pendant 09 - 900mm pendant 12 - 1200mm pendant	09 - 600mm pendant 12 - 900mm pendant (only available for fuga 1200)
Ordering example: KR974262-8527-SW-06-09				

