


kreon holon 40 gearbox


Project private residence
Location The Netherlands

Architect Lumio
Photographer Serge Brison

kreon holon 40 gearbox are surface mounted luminaires with one or two spot lights and integrated gear. Like all kreon holon 40 luminaires, the lamp heads can be rotated 360° and tilted up to 90°, and come with multiple reflector options. Among the available dimming options are Casambi and DALI dimming.

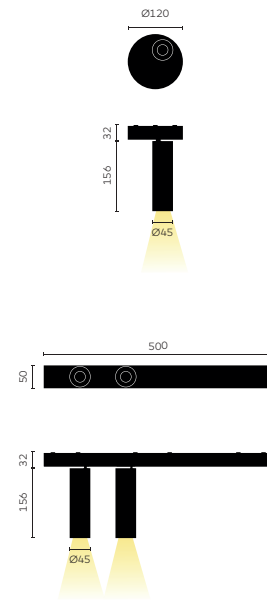


general information	
application	surface-mounted luminaire for ceilings
IP classification	40
input voltage	230V
electric gear + gearbox	included
louvre	always black for DL/WDL
illuminant (per lamphead)	
output SP-FL-WFL	558lm
output DL-WDL	417lm

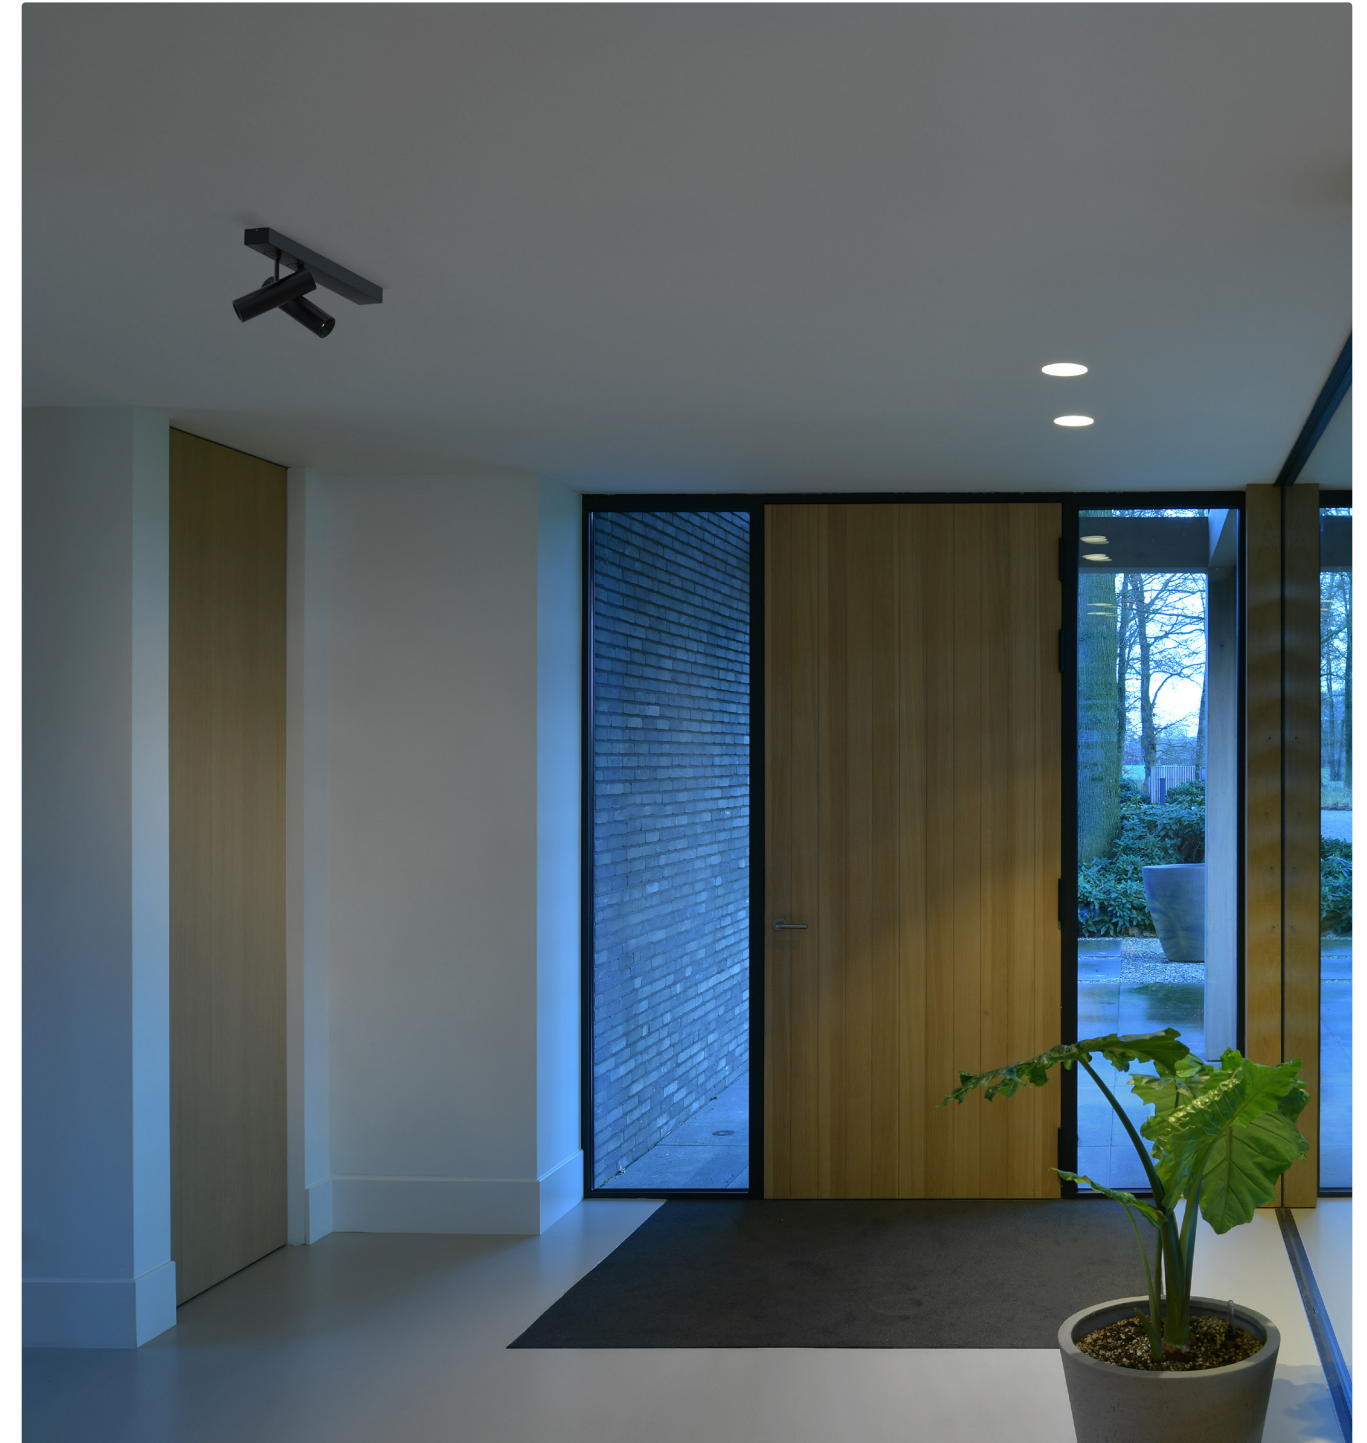


Ordering Codes

KR_____	___-	___-	___
basic code	CCT-CRI	optic	dim protocol
KR962501 - holon 40 directional single, white KR962502 - holon 40 directional single, black KR962511 - holon 40 directional double, white KR962512 - holon 40 directional double, black	9027 9030	SP - spot 20° FL - flood 30° WFL - wide flood 40° DL - dark light 38° WDL - wide dark light 76°	PD - phase dim DD - dali dim (only available with holon 40 double) VD - 1-10V (only available with holon 40 double) CD - casambi (only available with holon 40 double)
Ordering example: KR962501-9027-SP-PD			

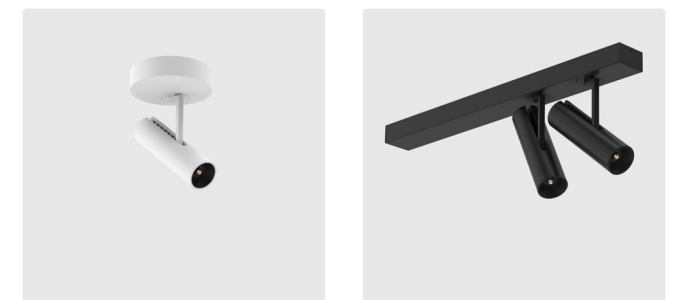


kreon holon 40 gearbox

kreon holon 40 gearbox are surface mounted luminaires with one or two spot lights and integrated gear. Like all kreon holon 40 luminaires, the lamp heads can be rotated 360° and tilted up to 90°, and come with multiple reflector options. Among the available dimming options are Casambi and DALI dimming.

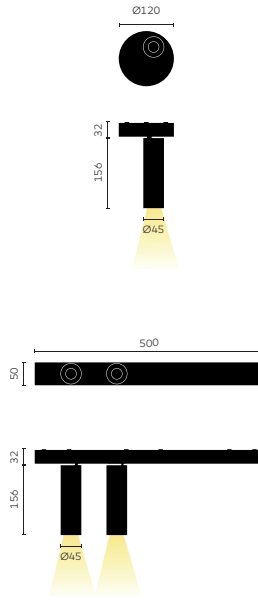


general information	
application	surface-mounted luminaire for ceilings
IP classification	40
input voltage	230V
electric gear + gearbox	included
louvre	always black for DL/WDL
illuminant (per lamphead)	
output SP-FL-WFL	558lm
output DL-WDL	417lm

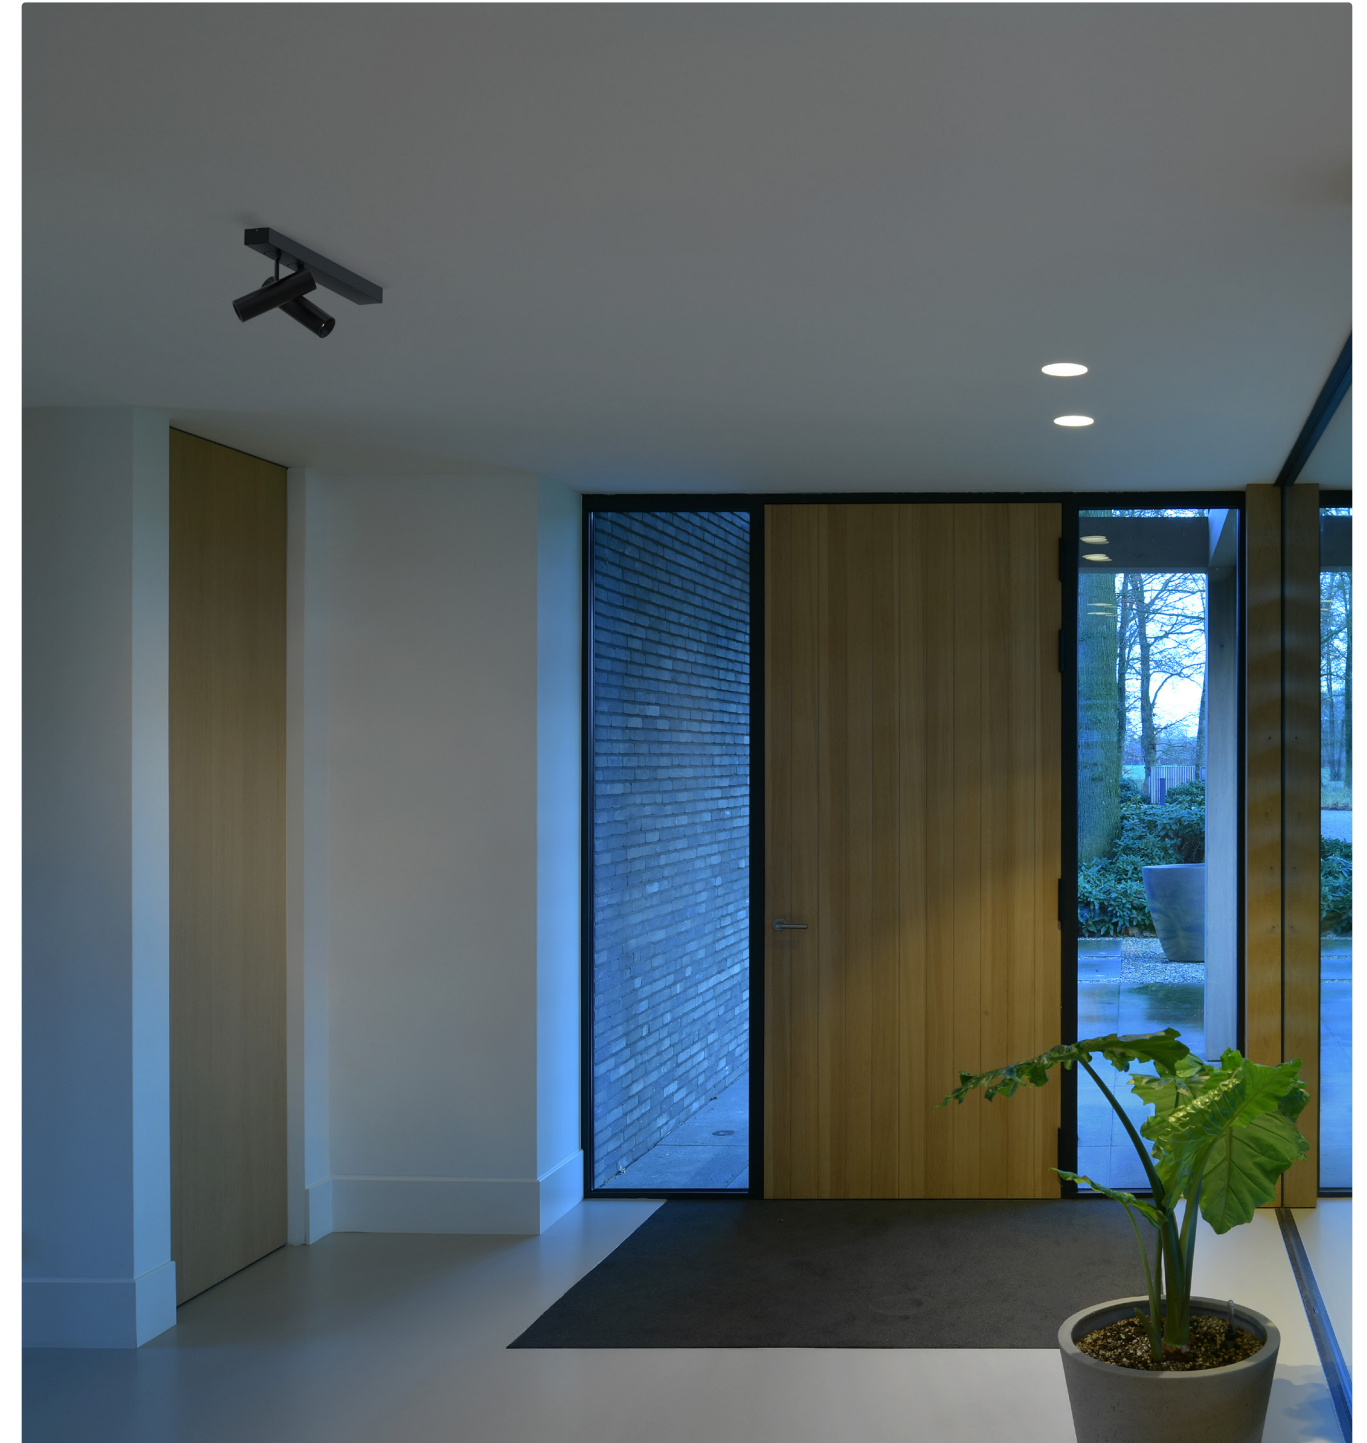


Ordering Codes

KR_____	___-	___-	___
basic code	CCT-CRI	optic	dim protocol
KR962501 - holon 40 directional single, white KR962502 - holon 40 directional single, black KR962511 - holon 40 directional double, white KR962512 - holon 40 directional double, black	9027 9030	SP - spot 20° FL - flood 30° WFL - wide flood 40° DL - dark light 38° WDL - wide dark light 76°	PD - phase dim DD - dali dim (only available with holon 40 double) VD - 1-10V (only available with holon 40 double) CD - casambi (only available with holon 40 double)
Ordering example: KR962501-9027-SP-PD			

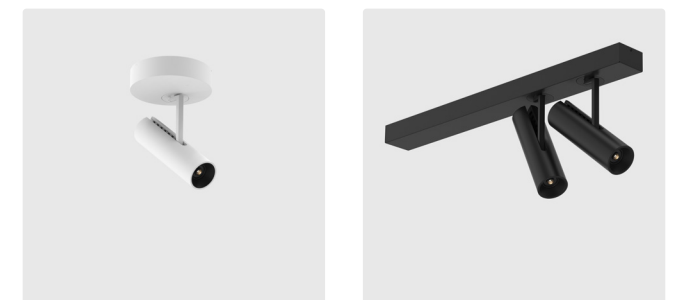

kreon holon 60 directional is a surface mounted spotlight with a rotational adjustment of 360° and an angular adjustment of 90°, which, when combined with the choice of superspot, spot, flood and wide flood reflector, provides a truly versatile accent lighting tool.

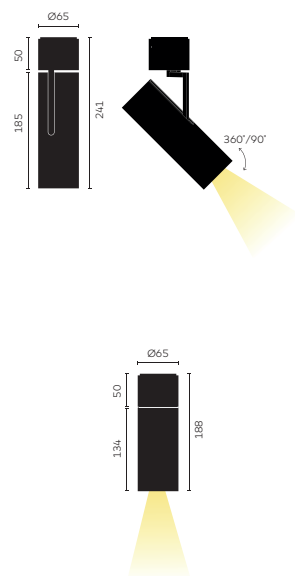

general information

application	surface-mounted luminaire for ceilings
IP classification	40
input voltage	230V
electric gear	included

illuminant


output CRI 90+	up to 1211lm
output CRI 95	up to 1090lm



Ordering Codes


KR_____	___	___	___
basic code	CCT-CRI	optic	dim protocol
KR962161 - holon 60 dir., deep recessed louvre, white	9027	SSP - superspot 18°	DD - dali
KR962162 - holon 60 dir., deep recessed louvre, black	9030	SP - spot 34°	SW - on/off
KR962165 - holon 60 dir., deep recessed louvre, white/black	9040	FL - flood 54°	
KR962461 - holon 60 directional, low louvre, white	9527	WFL - wide flood 69°	
KR962462 - holon 60 directional, low louvre, black	9530	(only with low louvre)	
KR962861 - holon 60 fixed, low louvre, white	9540		
KR962862 - holon 60 fixed, low louvre black			

Ordering example: KR962161-9027-SP-DD

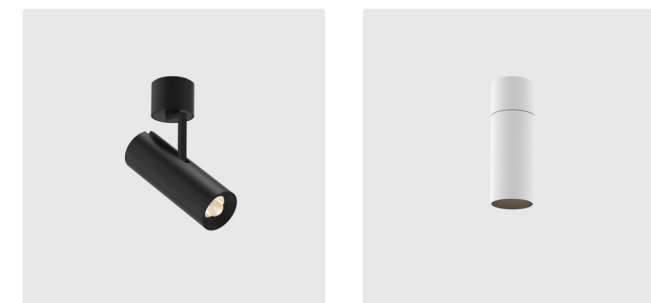

kreon holon 80 directional is a surface mounted spotlight with a rotational adjustment of 360° and an angular adjustment of 90°, which, when combined with the choice of spot, flood and wide flood TIR reflector, provides a truly versatile accent lighting tool.

kreon holon 80 fixed is the perfect solution for general lighting and features a flood beam mirror reflector set above the black or white internal louvre, optimised to create pools of light on horizontal surfaces or dramatic scalloping effects on verticals.

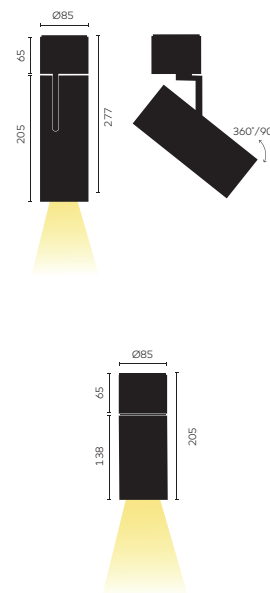

general information

application	surface-mounted luminaire for ceilings
IP classification	40
input voltage	230V
electric gear	included

illuminant

output CRI 90+	1641lm
output CRI 95+	1127lm




Ordering Codes

KR____-	___-	___-	___
basic code	CCT-CRI	optic	dim protocol
KR962021 - holon 80 directional, white KR962022 - holon 80 directional, black	9027 9030 9040 9527 9530 9540	FL - flood 30° WFL - wide flood 38°	DD - dali dim SW - on/off
Ordering example: KR962221-9027-SP-DD			



kreon holon 60 directional is a surface mounted spotlight with a rotational adjustment of 360° and an angular adjustment of 90°, which, when combined with the choice of superspot, spot, flood and wide flood reflector, provides a truly versatile accent lighting tool.

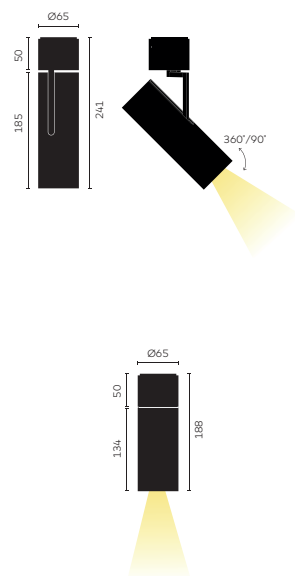

general information

application	surface-mounted luminaire for ceilings
IP classification	40
input voltage	230V
electric gear	included

illuminant


output CRI 90+	up to 1211lm
output CRI 95	up to 1090lm



Ordering Codes


KR_____	___	___	___
basic code	CCT-CRI	optic	dim protocol
KR962161 - holon 60 dir., deep recessed louvre, white	9027	SSP - superspot 18°	DD - dali
KR962162 - holon 60 dir., deep recessed louvre, black	9030	SP - spot 34°	SW - on/off
KR962165 - holon 60 dir., deep recessed louvre, white/black	9040	FL - flood 54°	
KR962461 - holon 60 directional, low louvre, white	9527	WFL - wide flood 69°	
KR962462 - holon 60 directional, low louvre, black	9530	(only with low louvre)	
KR962861 - holon 60 fixed, low louvre, white	9540		
KR962862 - holon 60 fixed, low louvre black			

Ordering example: KR962161-9027-SP-DD

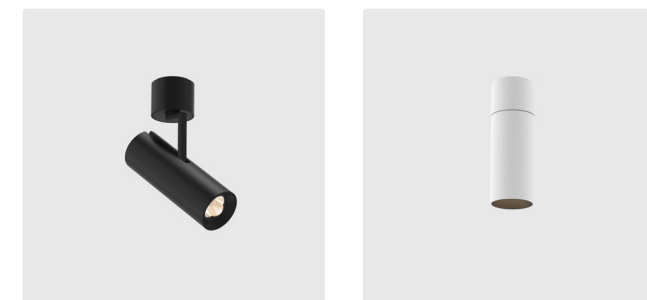

kreon holon 80 directional is a surface mounted spotlight with a rotational adjustment of 360° and an angular adjustment of 90°, which, when combined with the choice of spot, flood and wide flood TIR reflector, provides a truly versatile accent lighting tool.

kreon holon 80 fixed is the perfect solution for general lighting and features a flood beam mirror reflector set above the black or white internal louvre, optimised to create pools of light on horizontal surfaces or dramatic scalloping effects on verticals.

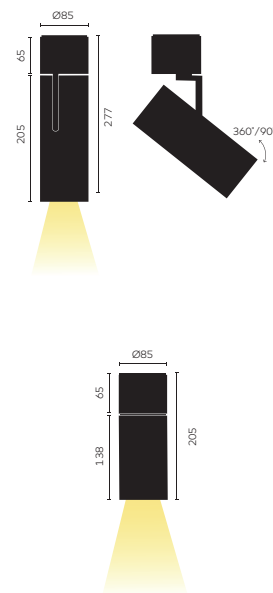

general information

application	surface-mounted luminaire for ceilings
IP classification	40
input voltage	230V
electric gear	included

illuminant

output CRI 90+	1641lm
output CRI 95+	1127lm



Ordering Codes

KR____-	___-	___-	__
basic code	CCT-CRI	optic	dim protocol
KR962021 - holon 80 directional, white KR962022 - holon 80 directional, black	9027 9030 9040 9527 9530 9540	FL - flood 30° WFL - wide flood 38°	DD - dali dim SW - on/off
Ordering example: KR962221-9027-SP-DD			

