


The simple and archetypical volume of kreon onn-wall creates an indirect ambient lighting making it an ideal fixture for highlighting all types of ceilings. kreon onn-wall 165 and 300 benefit from the photometric advantages of the latest lens technology, in combination with high performing LED and creates a evenly spread indirect light distribution



general information		
application	surface-mounted luminaire for walls	
IP classification	40	
input voltage	230V	
electric gear	included	
illuminant (per lamphead)		
output onn-wall 165	1590lm	
output onn-wall 300	3180lm	

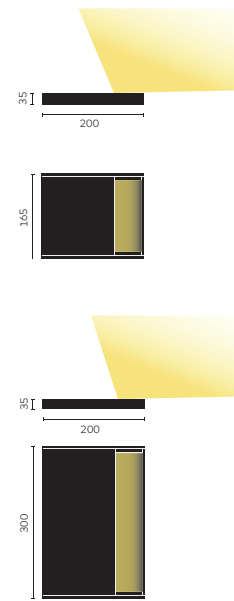

## Ordering Codes

KR_____	___-	__
basic code	CCT-CRI	dim protocol
KR983411 - onn-wall 165, wide beam, white KR983412 - onn-wall 165, wide beam, black KR983421 - onn-wall 300, wide beam, white KR983422 - onn-wall 300, wide beam, black	9027	VD - 1-10V DD - dali dim
Ordering example: KR983411-9027-VD		

