


kreon up 80 & 165




kreon up 80 & 165

up 80 square

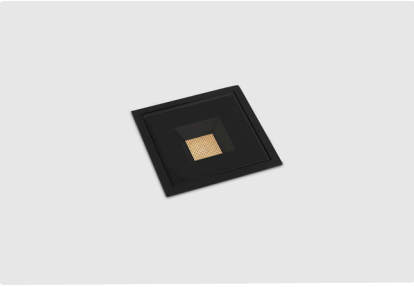

up 80 in-line circular

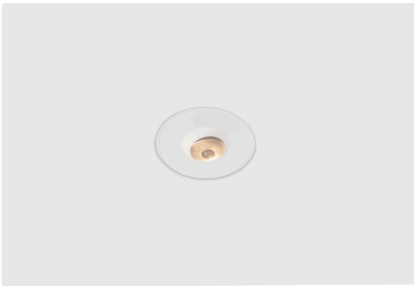

up 165 square



up 165 in-line circular



Applications

kreon up (in-line) 80 & kreon up (in-line) 165 are ranges of floor recessed up lighters characterised by their minimal appearance and optical functionality. The ranges are offered in both square and circular forms (with or without a trim), finished with black or white backed toughened glass with a satin stainless steel trim. LED modules are deep-set within the luminaires and are controlled by a choice of anti-glare louvre for precise uplighting; brightness limiting diffuser for ambient or orientation lighting; and wall wash optic for vertical illuminance. The units are sealed to IP67 and have a die cast aluminium and stainless steel housing to provide protection from the harshest environments.

Mounting

kreon up 80 has a visible width of 3³/₄" and kreon up 165 has a visible width of 6¹¹/₁₆". The luminaires are recessed luminaires for floors, with or without a trim.

Optical system / LED's

Different lm outputs available

Color temperatures / CRI

2700K, 3000K. CRI 90+

Controls / Dimming

1-10V, ON/OFF or DALI


Finish

The luminaire cover comes in a choice of natural anodised or black anodised. Custom RAL finishes are available on request.


ETL / UL

ETL listed indoor for dry locations.
Provides credits for LEED certifications.


up 80 circular dimensions

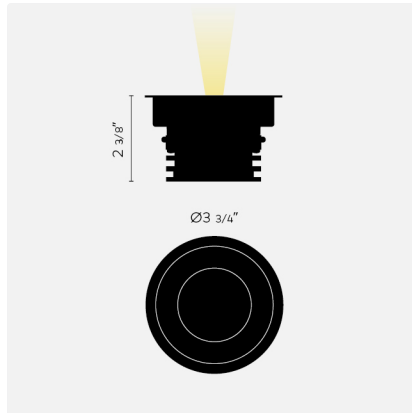

up 80 square dimensions

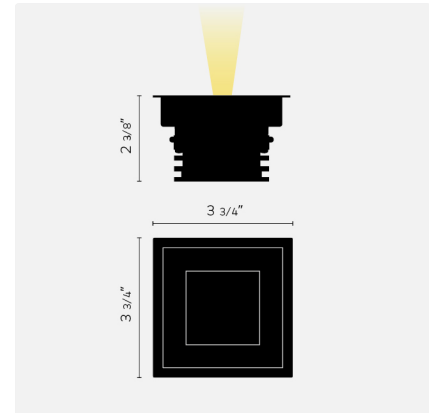

up 165 circular dimensions

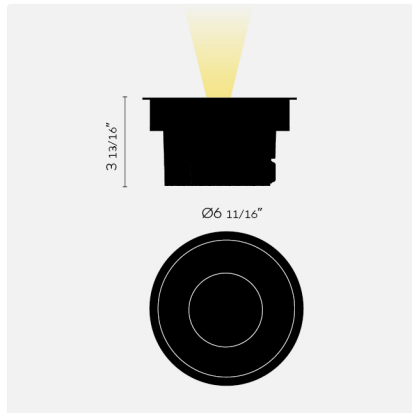

up 165 square dimensions

