

kreon esprit pendant

Date: _____ Customer: _____

Project: _____

Type: _____ Qty: _____

esprit pendant



KU _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____


kreon esprit	version ¹	CCT	CRI	beam angle	head Qty	remote dimming	mounting options
ESP esprit pendant <i>standard finish in black</i>	16 5' 3" [1600mm]	27 2700K	90 90+ min CRI	SP Spot 20° 195lm delivered	03 Double w/ single	D1 Triac Phase Dim (10%); 120VAC only	JBB 5" Junction Box Cover Cord Grip Black, Black Power Cord JBW 5" Junction Box Cover Cord Grip White, White Power Cord SF Surface Mount Connection Box RC Recessed Flush Connector w/ black cover for plastered surfaces (not compatible w/ junction box)
	18 5' 11" [1800mm]	30 3000K		DL Dark Light 33° 253lm delivered	**16 or 18 version only**	D2 0-10V dim (10%); 120/277VAC	
	24² 7' 10 1/2" [2400mm]			WDL Wide Dark Light 56° 247lm delivered	04 Double w/ Double	D2LD 0-10V Dimming (1%); 120/277VAC	
	24S² 7' 10 1/2" [2400mm]				**18 or 24 version only**	D4 EldoLED 0-10V dim to dark (0%); 120/277VAC	

Ordering Example: KUESP-18-27-90-WDL-03-D1-SF


¹ Head qty options are dependent on version

² Slight bowing in fixture for rigidity | Optional addition of 3rd mounting cable available to remove bowing.


JBB / JBW



SF

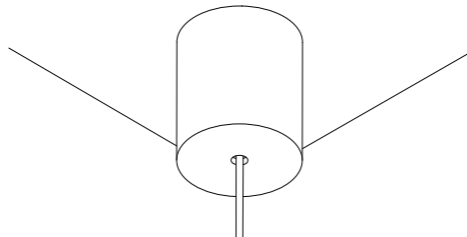


RC

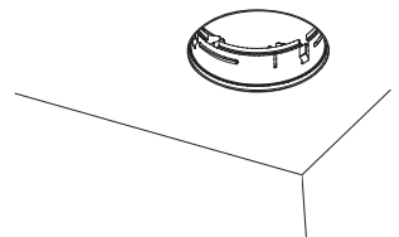


kreon esprit pendant


esprit 16 03

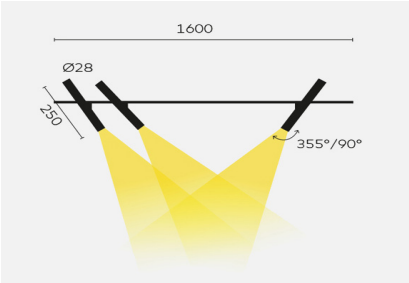


esprit 18 03

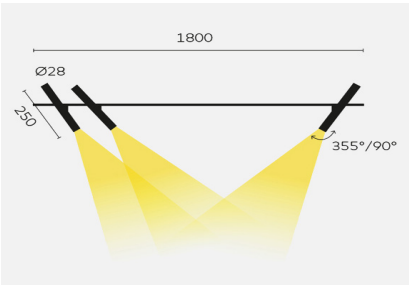

esprit 18 04

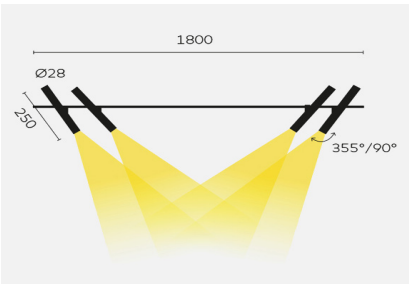

esprit 24 04

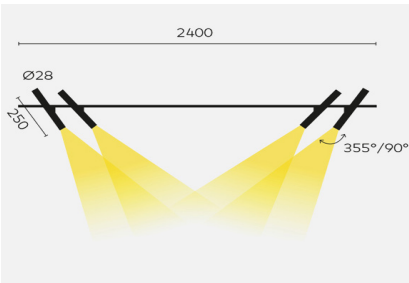


Slight bowing in fixture for rigidity | Optional addition of 3rd mounting cable available to remove bowing.

Description	kreon esprit pendant are 3 or 4 individual lampheads mounted on a slender horizontal bar with steel tension cable suspension for maximum flexibility. It can be installed as an individual element or in a cluster of two or more.
Finish	made from zamak die cast aluminum alloy. Available in matte black.
Optical system / LED's	LED life of L80 greater than 50,000 hours.
Color temperatures / CRI	Available in 2700K and 3000K
Controls / Dimming	Available with TRIAC phase dim (120V only) and 0-10V dim (120-277V)
ETL / UL	Esprit products are rated for indoor use only, in either a dry or damp location – IP40

Remote Driver Box Dimensions

Control Selection	Driver	Dimensions
D1	Triac Phase Dimming (10%)	7"x2.375"x1.5" (LxWxH)
D2	0-10V Dimming (10%)	7"x2.375"x1.5" (LxWxH)
D4	EldoLED dim to dark	16.5"x2.48"x1.97" (LxWxH)

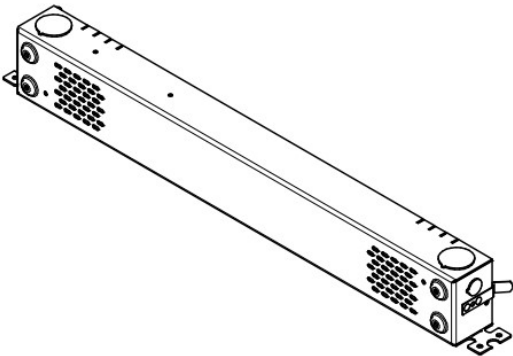

kreon esprit pendant

esprit Spot


Delivered Lumens: 195lm

CCT: 2700k

CRI: 90+

Power: 2W

Efficiency: 97lm/W

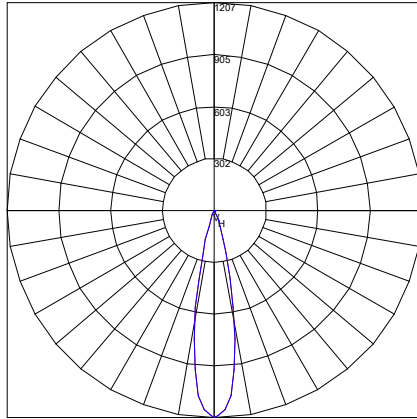

esprit Dark Light


Delivered Lumens: 253lm

CCT: 2700k

CRI: 90+

Power: 4W

Efficiency: 64lm/W

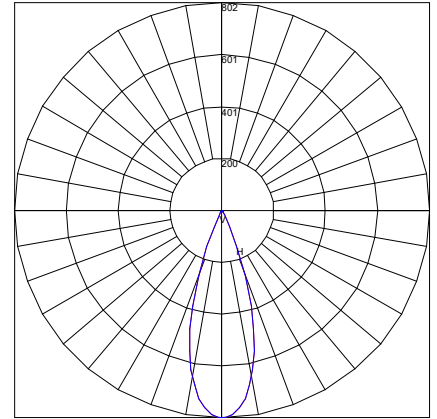

esprit Wide Dark Light

Delivered Lumens: 247lm

CCT: 2700k

CRI: 90+

Power: 4W

Efficiency: 61lm/W

