


belux lifto

date: _____ specifier: _____
 project: _____
 type: _____ qty: _____

lifto



litolino

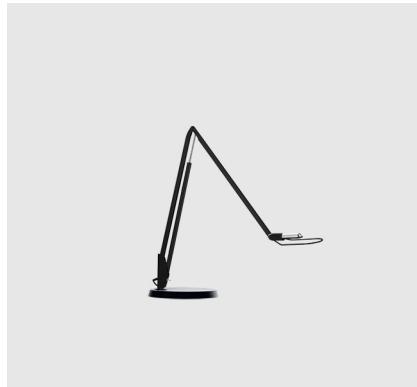

KU _____ - _____ - _____ - LED _____ - 90 - _____ + _____ + _____



belux lifto		mounting	finish	light source	CCT	CRI	options	
LIF	Lifto	TL table light	13 black anodized	LED	30 3000K (675lm)	90 CRI90+	TC	Table clamp (see page 3 for details)
LINO	Litolino, (small) table lamp with base	WALL wall mount	11 [*] chrome		40 4000K (675lm)		IB	Iron Base Black
							TA	Threaded adapter
							WB	Wall Bracket black
							WBC	Wall Bracket chrome plated

Ordering Example: LIF-TL-11-LED-30-90-TC

* This product is intended for indoor use only. ^{*} Not available with liftolino

lifto

liftolino

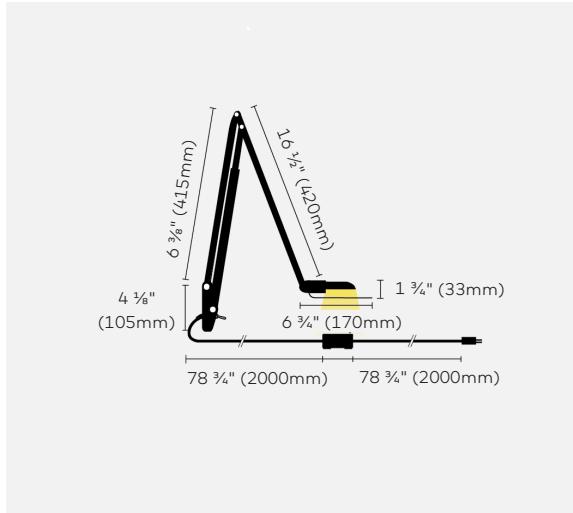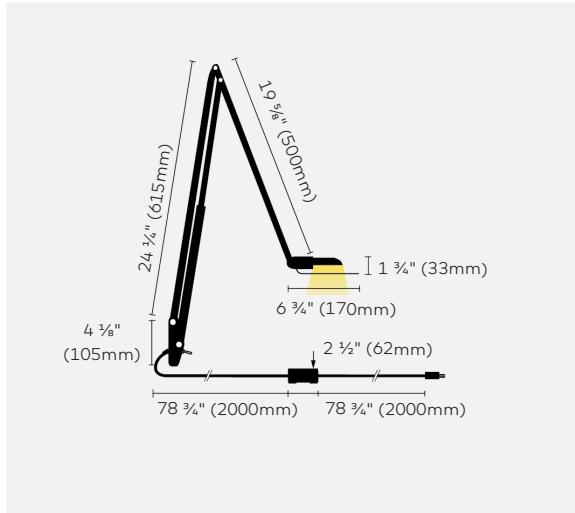

belux lifto, combines state-of-the-art functionality with timeless design. The use of gas pressure springs is unique in lighting construction and gives belux lifto its wide radius of action. The three articulated joints are easy to move with just one hand, yet the light stays unchanged in the desired position, even with this large radius of action. With 10 strong Power LEDs to illuminate the table over a wide and impressive area with high color rendering. The close arrangement of the LEDs precludes unpleasant multiple shadowing. Belux lifto is also designed so that the LED board can be replaced. belux lifto has a wide range of applications in both the office and the home. The smaller belux liftolino version is especially suitable for small tables or for bedside reading.

Description

Mounting

table light large with clamp or table light small with base

Material

lifto is available in chrome or black finish. liftolino is made of aluminum and available in black finish only.

Optical system / LED's

Available in 3000K or 4000k CRI 90+.

Controls / Dimming

integral dimming. The integrated tip-switch enables belux lifto to be dimmed from 100-1% or switched completely on or off. The electronics are designed for an operating lifetime of 50,000hrs

ETL / UL

Testing pending by ETL for installation in the US and Canada. Ingress Protection. IP20



belux lifto

rotation

three articulated joints are easy to move with just one hand



table clamp (TC) option

the optional table clamp can accommodate a maximum table thickness is 2 5/8". There is no minimum.



light module



Photometry

Lifto

Delivered lumens: 676lm

CCT: 4000K

CRI: 90+

Power: 35W

