

date: _____ customer: _____

project: _____

type: _____ qty: _____



wabi is a versatile external spotlight designed to provide architectural accent lighting to buildings. an LED light source is contained within the fully directional and lockable light head that can be fixed to walls or attached to the optional ground post. wabi can also be accessorised with an optional glare prevention cylinder to improve light control.

kreon wabi comes as a screwbased spotlight or as a bollard.

the luminaire head can be rotated 360° and tilted up to 90°. the inclination of the luminaire is lockable and can easily be set by using the marks indicated on the fixture.

with the use of the optional installation accessories, this compact spotlight is suitable for installation on a wide range of outdoor surfaces, like concrete, gravel and soil.

construction

luminaire

surface-mounted fixture for wall or floor applications. optional bollard in two sizes.

gear

internal or external

finish

black (RAL 9004)

mounting options

wall mount and floor mounting for concrete, wood and other surfaces available

electrical characteristics

classifications

IP65 outdoor rated

LED specification

4W LED chip, CRI 80, 387 lumens delivered, 2700 and 3000K CCT available

LED life

usable life of the LED chip at 50,000 hours at L70

gear

standard on/off dimming 0-10 Volt available on request.



ordering codes

KU__ -	__ -	30 -	__ -	80 -	BK -	__ -
KREON CODE	LIGHT MODULE	BEAM ANGLE	LIGHT SOURCE AND CCT	CRI	COLOR	OPTIONAL ACCESSORIES (BLANK FOR NONE)
wa80 - wabi 80 wa300 - wabi bollard 300 wa750 - wabi bollard 750	01 - LED gear included 03 - LED gear excluded	30°	27 - 2700K 30 - 3000K	80 - 80+	BK - black	gp - glare preventor ca - concrete anchor* gp - ground pin s - spacer ld5 - LED driver, 500mA, oo - ON/OFF, 15W (IP67) ld7 - LED driver, 700mA, 1-10V, 14W (IP67) ld7d - LED driver, 700mA, DALI 14W (IP67) ld10 - LED driver, 1050mA, 1-10V, 22W (IP67) ld10d - LED driver, 1050mA, DALI, 21W (IP67)

ordering example: KU-wa80-03-30-30-80-bk-id7

* not for wabi bollard

photometry — for full photometry, please reference IES files on www.kreon.com

KUwa80-01-03-27-80-BK

(no accessories)


light engine: 750 lumens

CCT: 2700K

CRI: 80+

power: 4W

luminaire output:
387 delivered lumens



KUwa80-01-03-30-80-BK

(no accessories)


light engine: 750 lumens

CCT: 3000K


CRI: 80+

power: 4W

luminaire output:
387 delivered lumens




dimensions

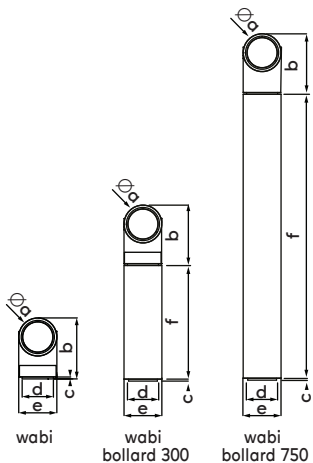


	wabi	wabi bollard 300	wabi bollard 750
a	3.95"	3.95"	3.95"
b	6.3"	6.3"	6.3"
c	0.2"	0.2"	0.2"
d	3.2"	3.2"	3.2"
e	3.95"	3.95"	3.95"
f	N/A	11.8"	29.5"


accessories




glare preventor



ground pin



concrete anchor



spacer



wabi luminaires are ETL listed for dry and damp locations.
wabi luminaires lend support for LEED credits and certification.