

IMPORTANT SAFETY INSTRUCTIONS - SAVE THESE INSTRUCTIONS

Installation instructions for KREON - PROLOGE 145 surface mounted

! WARNING: READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE STARTING INSTALLATION. SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

! RISK OF FIRE! - RISK OF SHOCK!
- INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS
THIS LUMINAIRE MUST BE INSTALLED TO CONFIRM WITH NEC AND ALL LOCAL ELECTRICAL & BUILDING CODES & PRACTICES. TO ASSURE

FULL COMPLIANCE WITH LOCAL CODES AND REGULATIONS, CONSULT WITH YOUR LOCAL ELECTRICAL INSPECTOR BEFORE INSTALLATION.
- DISCONNECT POWERSUPPLY BEFORE INSTALLING OR SERVICING
- ENSURE THE LUMINAIRE IS GROUNDED

- LUMINAIRE IS SURFACE MOUNTED ONLY
- SUITABLE FOR INDOOR DRY LOCATIONS ONLY

WARNING - to reduce the risk of FIRE OR INJURY:
- turn off power and allow to cool before replacing lamp

1 notifications

- lamp gets HOT quickly! contact only switch/plug when turning on
- do not touch hot lens, guard, reflector or enclosure
- keep lamp away from materials that may burn
- do not operate the luminaire with a missing or damaged shield, if required
- this luminaire can only be used with Kreon accessories

This installation manual might not cover all details or variations. When additional information is required, please contact your local representative, or one of the Kreon offices.

Notice de montage pour KREON - PROLOGE 145

! ATTENTION: LIRE ET COMPRENDRE TOUTES LES INSTRUCTIONS AVANT L'INSTALLATION CONSERVER CES INSTRUCTIONS POUR DE FUTURES REFERENCES

! RISQUE D'INCENDIE!
! RISQUE DE CHOC!

- INSTRUCTIONS RELATIVES À UN RISQUE D'INCENDIE OU DE BLESSURE
- CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS
- CONSULTER UN ELECTRICIEN QUALIFIE POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DERIVATION SONT ADEQUATS


- COUPER L'ALIMENTATION AVANT L'ENTRETIEN
- ASSURER QUE LE LUMINAIRE EST MIS A LA TERRE
- MONTER LE LUMINAIRE EN SURFACE SEULEMENT
- POUR EMBLACEMENT SECS SEULEMENT

ALERTE - pour réduire le risque D'INCENDIE OU DE BLESSURE:
- coupez l'alimentation électrique et laissez refroidir avant de remplacer l'ampoule
- la lampe chauffe rapidement!
- ne touchez pas l'objectif à chaud, la garde, le réflecteur ou une enceinte
- gardez le luminaire loin de matériaux qui peut brûler
- luminaires équipés avec un verre de sécurité doivent operé d'un verre de

sécurité complet et en place, si nécessaire
- le luminaire ne peut être utilisé qu'avec des accessoires de Kreon

Cette notice de montage ne couvre pas tous les détails ou les variations. Pour des informations supplémentaires veuillez contacter votre représentant local ou un des bureaux Kreon.

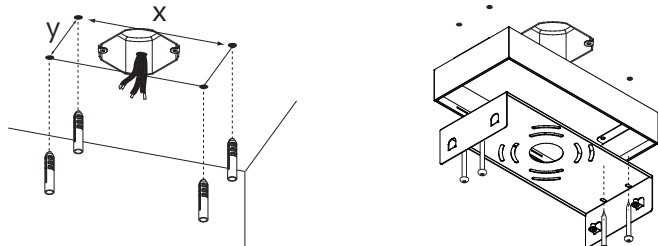
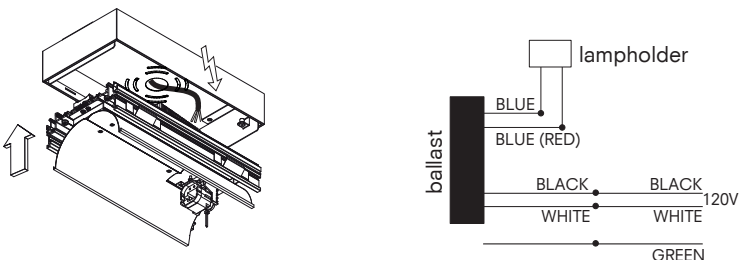

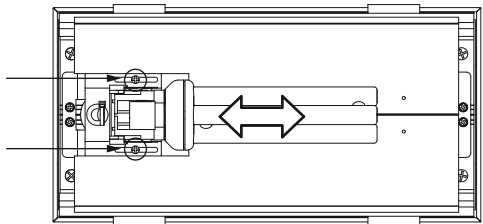
Prologe 145 Double



Prologe 145 Double

Name	Reference	L x W x H
Prologe 145 Double	ku98425_	11"x5 1/2"x6 1/8"

2 dimensions

technics				<table><tr><td>Name</td><td>Reference</td><td>X - Y</td></tr><tr><td>Prologe 145 Double</td><td>ku98425_</td><td>10 1/4" - 17/8"</td></tr></table>		Name	Reference	X - Y	Prologe 145 Double	ku98425_	10 1/4" - 17/8"
Name	Reference	X - Y									
Prologe 145 Double	ku98425_	10 1/4" - 17/8"									
3	installation	<p>drill holes at correct distance and place plugs (see table)</p> <p>place bracket into ceiling housing and fix with screws</p>									
4	connection	 <p>connect to correct current (see table)</p> <p>wire scheme</p>		<ul style="list-style-type: none">- connect black wire from transformer to black supply wire- connect white wire from transformer to white supply wire- connect green grounding wire from conduit to green grounding wire from luminaire <table><tr><td>Reference</td><td>Voltage ⚡</td></tr><tr><td>ku98425_</td><td>120V or 277V</td></tr></table>		Reference	Voltage ⚡	ku98425_	120V or 277V		
Reference	Voltage ⚡										
ku98425_	120V or 277V										
5	installation	 <p>CLICK!</p> <p>CLICK!</p> <p>place housing over springs until it clicks. don't push housing against ceiling housing</p> <p>insert lamp and insert louvre in the housing</p> <p>before inserting, slide the "de-glaring prism" in louvre*</p> <p>*cones should be directed downwards</p>									
6	lamp placement	 <p>depending on the used lamp (wattage), it can be necessary/desired to center the lamp. This can be done by loosening the 2 screws, slide the lampholder, and fixate the screws again.</p>		