


# kreon installation manual

## technics & dimensions

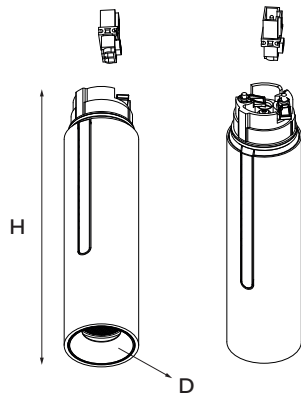


name	reference	current	wattage	HxD
holon 40 directional in-cana	KR93430x-xxxx-xx	700mA	8.4W	183x45

Please make sure the main voltage is disconnected before proceeding! ⚡

## 1. light source information

### light source containing product


The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.




Energy Efficiency Class and EPREL-information for each specific LED/fixture can be found on the last page of this manual

## 2. installation

### electrical diagram

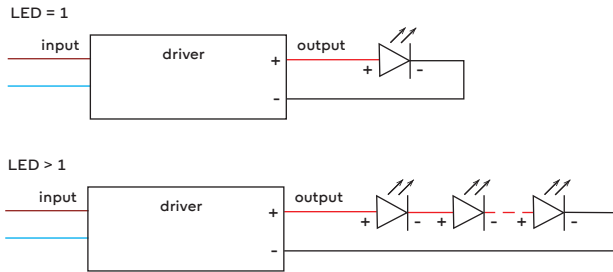

### electrical diagram TW

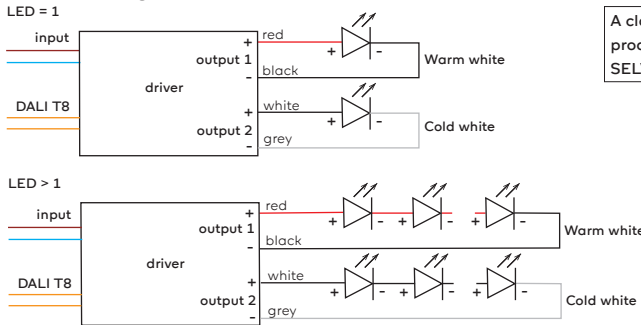


A class III-product or a string of these products in series, can only be used with a SELV gear where  $U_{out} \leq 120VDC$ !


# kreon installation manual

## 3. installation


To install the plasterkit, check installation manual KR8050002138

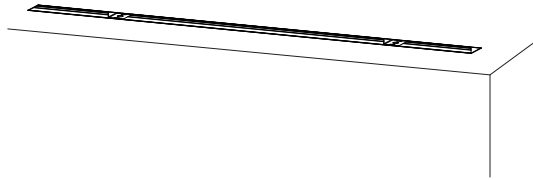

To install the main profile, check installation manual, KR8000002153 or KR8000002156


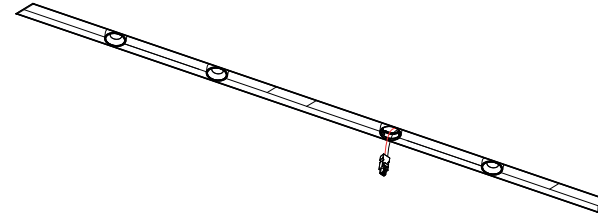


female connectors are already provided inside the cana profile were a holon 40 directional needs to be installed


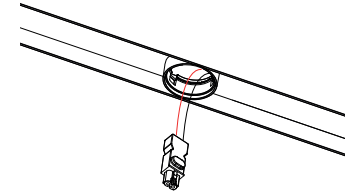


## 4. installation

connect the male connector from the holon to the female connector from the cana profile. before installing the holon inside the cana profile, make sure the fixing parts are pointed to the center

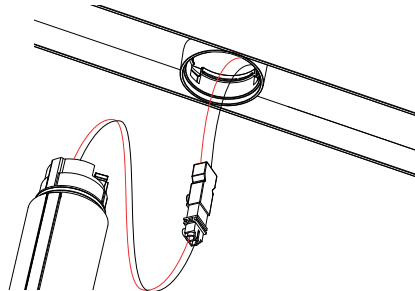


align this opening inside the installation ring with the stopper inside the installation part

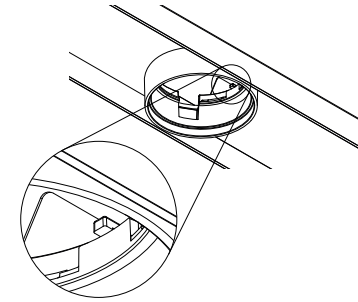


## 5. installation


inclinate the tube by pulling it, to make space to reach the screwholes

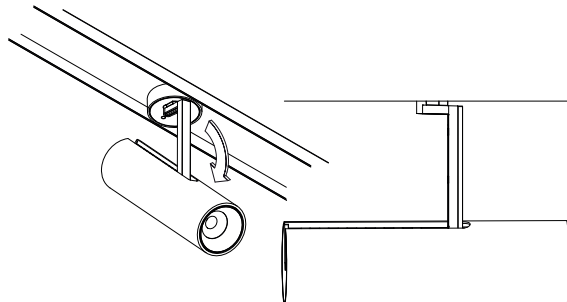

rotate the fixture until the holes in the plate match the position of the screws in the installation part

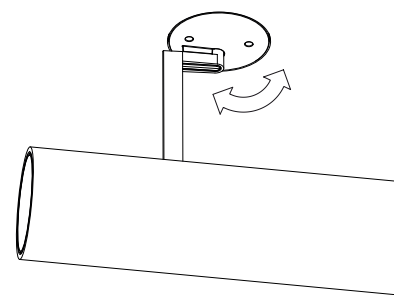


fix the complete fixture by turning the screws with the hexagon key




# kreon installation manual

## 6. installation

once the holon is completely installed  
it can be inclined in any angle up to 90° by pullin the tube

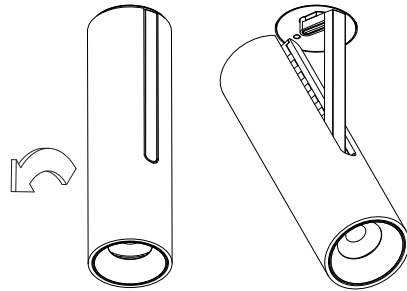


it can also be rotated for 330°

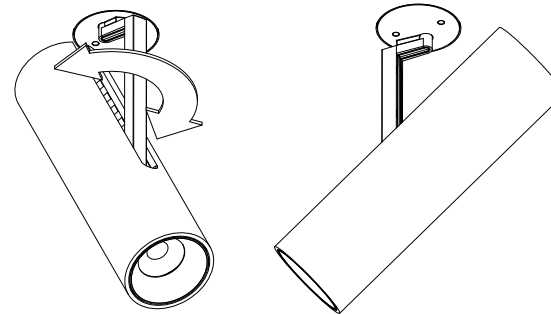


## 7. accessories

in case of accessories check the manual KR8622102021 delivered  
with the accessory, only one accessory per holon


KR762000



KR762100



KR762200



## pictures

